

# PTT 288



**PTT-TH288**

# PTT-T288

## IP Walkie-Talkie

### Small Handheld LTE Real PTT Radio TH-288

- 1.Supports **2G/3G/4G** network
- 2.Supports **Group call, Selective call, Friend call, Emergency call**
- 3.Can receive **Dispatcher message**
- 4.**SOS** (Alarm Button)
- 5.**Quick charging charger**
- 6.Simple & Clearly Menu
- 7.**Excellent hand feeling**

### Quick Details:

**Weight (body):** 181g

**Size:** 12.7(L)×6.0(W)×3.5(H) cm

**OLED Display:** 0.96 inch / 128\*64 pixels

**Battery Capacity:** 3.7V 4000mAh

**Frequency:** 4G LTE (Have multiple versions for different countries)

& 3G UMTS900/2100MHz 2G GSM900/1800(or 3G UMTS850/1900MHz 2G GSM850/1900)

**Talking Range:** unlimited

**Group/Private/Friend/Emergency Calls:** yes

**GPS:** yes

**Operation System:** Linux

**Popular for:** Security guard, Construction, Logistics, Taxi, Truck, Army, Government, Rescue, Police, Railway, Airport, Outdoor adventure




## Items in the Package


# PTT-T288 IP Walkie-Talkie

**Carefully unpack the radio.**


We recommend that you identify the items listed in the following table before discarding the packing material.




USB Cable



Adapter



Battery

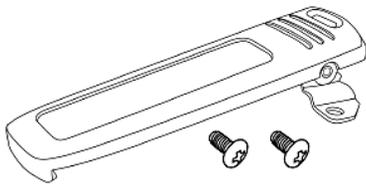

Belt Clip




User's Manual

- 1 x Charger Cradle
- 1 x USB Cable
- 1 x Adapter
- 1 x Battery
- 1 x Belt Clip
- 1 x User's Manual
- 1 x USB

# OVERVIEW

# PTT-T288

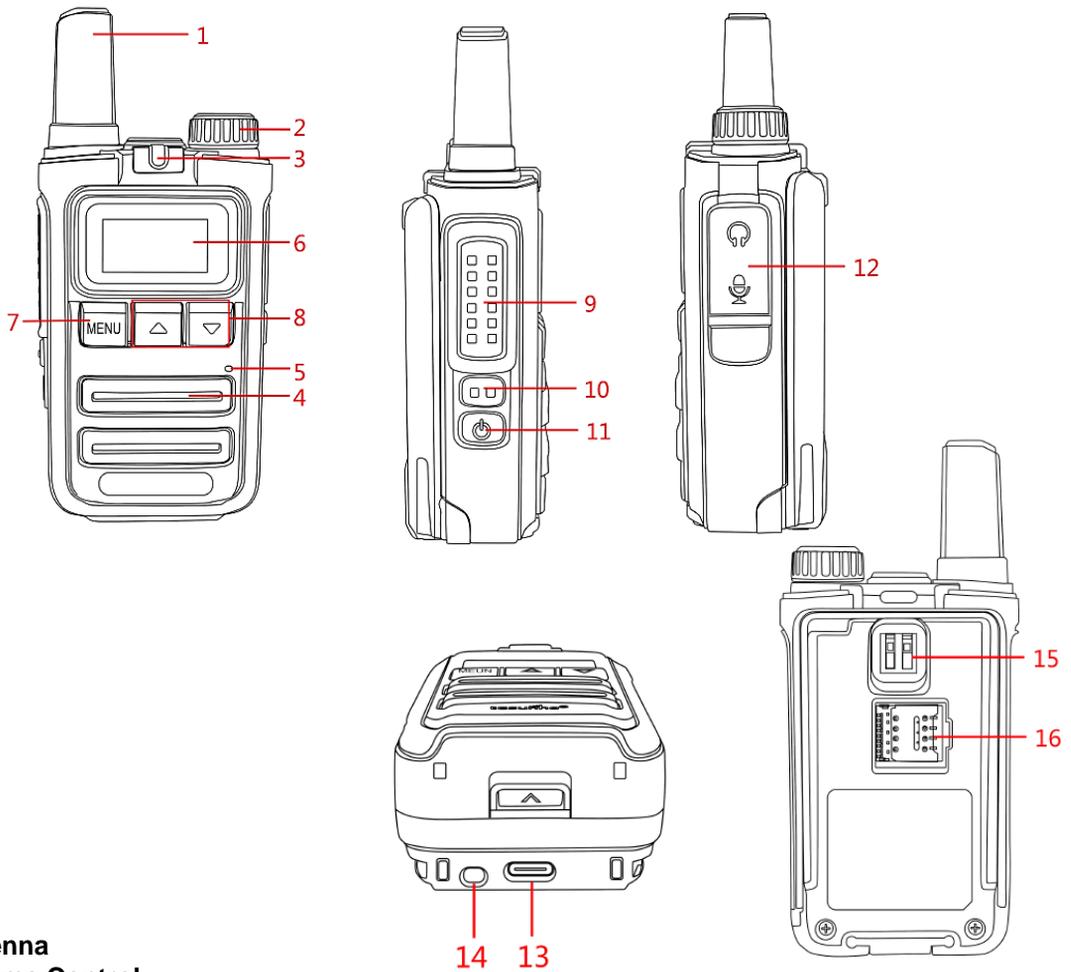

**1. Antenna**

**2. Volume Control**

Turn the volume control clockwise to increase volume.

Turn the volume control anticlockwise to decrease volume.

**3. Indicator Lamp**

Light Red: Transmitting

Light Blue: Receiving

**4. Speaker**

**5. Mic**

**6. LCD Screen**

**7. MENU Key**

Short press to enter the submenu or confirm/save the selection

**8. UP Key & DOWN Key**

Press "▲" or "▼" Key to select items

On standby states, short press up key or down key to enter the group selection

**9. PTT**

Press PTT to transmit, release PTT to return to receive states

In any states, short press PTT to return the standby, and begin to talk

**10. PF1 Button**

In standby mode, short press to enter the friend list

In any mode, long press the button to send the SOS on the selected group.

**11. PF2 Button**


**12. Programming Jack**

**13. Charging Jack (Optional)**

**14. Charging Indicator Lamp (Optional)**

**15. Contact**

**16. SIM Card Slot**

Icon	Name	Status
	Battery Power	More bars indicate more battery power
	Battery Charging	On charging
	SOS	Transmit SOS or receive SOS
	GPS	Solid Icon means positioning successful Hollow Icon means no positioning successful
	Key lock	Keypad locked
	New Dispatcher MSG	New Dispatcher MSG, not yet be read
	signal strength	More bars indicate stronger signal strength

## NOTE

**Please check the following two items before using.**

- a. Please make sure the SIM card has been activated and has started the data service.
- b. Please make sure the radio has been programmed with the activated platform account and the correct APN information. If not, please contact local dealer for assistance.

### 1. Power On / Off

Long press the button to power on / off. NOTE: Can not remove battery directly to power off, otherwise it will lead to the data loss and the radio damages.

### 2. Transmitting

Press PTT to transmit ( LED indicator lights red), keep away from microphone at least 5cm. Exception & Talking Priority: If there is an advanced user starts to talk when you're transmitting, you will be forced to exit the transmitting mode.

### 3. Receiving

The LED indicator lights blue, LCD screen displays transmitter's name when receiving.

## MENU INSTRUCTIONS

# PTT-T288

- Press MENU Key to enter menu
- Press “▲” or “▼” Key to choose menu item
- Short press PF2 button return the previous menu list
- Press MENU Key to confirm the selection

Menu	Sub Menu	Settings	Function Instruction	
MENU	Choose Group		The selection can enter once radio log in.	
	Friend List		Select one or multiple online friends make private call	
	User List		Select one or multiple online user make private call	
	Dispatcher MSG		Enter to check dispatcher messages	
	PTT Records		Enter to check the voice records.	
	GPS INFO		Enter to check the local GPS information.	
	ADV Settings	Network Mode		Auto/ 3G Prefer /2G only /3G only/ 4G only
		MIC		Standard +1/+2/-2/-1
		SPK		Standard +1/+2/-2/-1
		Sound Quality		STD Mode / HQ Mode
		SOS Mode		<b>OFF:</b> Close SOS function. <b>Normal:</b> SOS alarm every 30 seconds and will stop after 3 cycles. <b>HOT MIC:</b> SOS alarm 30 seconds, auto open MIC for 10 seconds, then close for 20 seconds, and will stop after 3 cycles
		Record Control		Enter to turn on/off the PTT voice record function.
		Time Zone		Enter to choose the correct local Time Zone
		POC Update		Enter to check the current POC version or update it
	Settings	Backlight Mode		<b>Open:</b> Backlight keeps on. <b>Auto:</b> Backlight turns on automatically when operating on keys, transmitting or receiving happens. Backlight off automatically after 10 seconds no operation. <b>Key:</b> Backlight on automatically when operating on keys. Backlight off automatically after 10 seconds no operation
		Auto lock		<b>ON:</b> Keypad locked automatically after 10 seconds no operation. Only PTT button and Side Keys can use. <b>OFF:</b> Long press Side key 2 for 2 seconds to lock/unlock the keypad manually.
		Language		English / Spanish / CHS
		Key Tone		<b>ON:</b> A beep when operating on keys <b>OFF:</b> No voice when operating on keys.
		Roger Beep		<b>ON:</b> A beep when transmitting. <b>OFF:</b> No voice when transmitting.
		Version		Enter to check the software version, network mode, IMEI

**1. Monitor Group**

Enter group list, short press “PF1” key to monitor other group(s), ICON showed. Short press again to cancel.

**2. Private Call, Multi-member Selective Call, Temporary Group**

- **Private call:** Select the friend / member from the friends / members list, short press the MENU button to call
- **Multi-member Selective Call:** Short press PF1 to select multi-member from friends/members list.
- **Temporary Group:** Private call or multi-member call to create the temporary group. Short press PF2 button to exit the temporary group.

**3. Key Locked Function**

Long press the MENU button to lock or unlock, under the key locked condition, only the PTT , PF1, long pressed PF2, long pressed MENU button can work.

