

VECTOR OPTICS 2023 CATALOG



CATALOG

VECTOR OPTICS®



OPTICS FEATURES

 Extra Large EYE-BOX	 Short-range Self-defense	 Reset to Zero	 Premier & Protective Multi Coatings	 Motion Sensor (MOS)	 Night Vision Device
 93% Light Transmission	 Target Long Range	 Zero Stop	 7075-T6 Aluminum Housing	 30 Mins Auto Shut Down	 Thermal Optics
 LAREE Lens	 Hunting Style	 Edge-to-Edge	 Parallax Free	 Auto Light Sensor (AUT)	 Bird Watching
 ED Glass (Extra-Low Dispersion)	 Tactical Style	 FP Focal Plane	 NV Night Vision Dot Compatible	 Solar Panels	 With Rings
 Fully Multi-Coated	 Illumination	 MM Tube Size	 Battery Side Loaded	 Fog Resistance	 Tube Sunshade
 VePRO FMC (Fully Multi-Coated)	 Digital User Control	 ZOOM Zoom Factor	 Large Window	 IPX4 Water Resistance	 Honeycomb Sunshade
 LAREE Ultra HT Lens (High Transmittance)	 Direct Ultra Bright Source	 Side Focus	 Gram The Lightest Weight Design	 IP67 Water Proof	 Lens Cover
 7075 T6 High Performance Adjustment	 Turret Lock	 M-∞ Focus Range	 Audible Mechanical Clicks	 1000G Shock Proof	 Flip-up Cap
 N ₂ Nitrogen Purged	 Capped Adjustment	 X MOA Dot Size	 Multi-Reticle	 LIFETIME WARRANTY Warranty	 Throw Lever Compatible



CONTINENTAL[®] 34MM FFP

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCFF-31	1-6x	28mm	8.0-4.6	122.5-20.4 feet	40.8-6.8 meters		296 / 11.7	550 / 19.4		52MIL	20MIL		100yds	
SCFF-28														
SCFF-43	3-18x	50mm	8.0-2.8	40.8-6.8 feet	13.6-2.3 meters		337 / 13.3	720 / 25.4		44MIL	16MIL			
SCFF-29						100 / 4.0			34mm			1/10MIL		6 levels FF
SCFF-40	4-24x	56mm	8.0-2.3	30.6-5.1 feet	10.2-1.7 meters		362 / 14.3	780 / 27.5		34MIL	16MIL		10yds to ∞	
SCFF-39														
SCFF-30														
SCFF-41	5-30x	56mm	8.0-1.8	24.5-4.1 feet	8.2-1.4 meters		392 / 15.4	810 / 28.6		26MIL	16MIL			



Warranty



Focal Plane



Tube Size



6x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



LaREE Lens



Light Transmission



Edge-to-Edge



Extra Large EYE-BOX



Water Proof



Shock Proof



Target Long Range



Nitrogen Purged



Turret Lock



Reset to Zero



Zero Stop



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



7075 T6
High Performance Adjustment



Tube Sunshade



With Rings



Lens Cover

CONTINENTAL[®] 34MM FFP

First Focal Plane

FEATURES

34mm Monotube

True 6x Zoom Factor

>90% Light Transmission

LaREE Lens & VePRO FMC

Etched Glass Illuminated Reticle

Extreme Precision 1/10MIL Adjustment With Zero-Stop

All Fields Of Application For Hunting, Sporting & Competition



Power Ring Throw Lever
(SCCON-TL)



Parallax Big Side Wheel
(SCCON-SW)



Metal Flip-up Cap

CONTINENTAL[®] 34MM FFP 1-6x28 | 3-18x50 | 4-24x56 | 5-30x56

34mm



Continental[®] 10



RETICLES

Marno Denner, South Africa

Outstanding clear glass to see detail very well at long distances which makes it very easy to identify targets or to see bullet impact.


The turrets are the best features, they have a ton of adjustment, super crisp, very positive and very audible and with a zero-stop turret included.

Overall, from the ocular focus, zoom ring, turrets and side focus wheel there is NO slop or play which makes this scope the best value for money.


The reticle comes with a ton of holdover indications and just the right thickness.



VCT-BNW (MIL)



VCT-34FFP (MIL)



VEC-MBR (MIL)

SCFF-31 | 1-6x28
SCFF-28 | 3-18x50
SCFF-43 | 3-18x50
SCFF-29 | 4-24x56
SCFF-40 | 4-24x56
SCFF-39 | 4-24x56 **FDE**
SCFF-30 | 5-30x56
SCFF-41 | 5-30x56

VCT-BNW
VCT-34FFP
VEC-MBR
VCT-34FFP
VEC-MBR
VEC-MBR
VCT-34FFP
VEC-MBR



CONTINENTAL[®] HUNTING

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-23	1-6x	24mm	9.5-4.0	124.5-20.7 feet	42-7.0 meters	100 / 4.0	283 / 11.1	480 / 16.9	30mm	140MOA	140MOA	1/2MOA	100yds	6 levels ✖
SCOM-23	1.5-9x	42mm	9.5-4.9	84-14 feet	28-4.7 meters		335 / 13.1	580 / 20.5						
SCOM-15	2-12x	50mm	9.5-4.2	63-10.5 feet	21-3.5 meters			605 / 21.4						
SCOM-38	2.5-15x	56mm	9.5-3.7	49.8-8.3 feet	16.6-2.8 meters	100 / 4.0	370 / 14.6	670 / 23.6	30mm	110MOA	110MOA	1/4MOA	10yds to ∞	6 levels ✖
SCOM-34														
SCOL-X21	3-18x	50mm	9.5-2.8	41.5-6.9 feet	13.8-2.3 meters		337 / 13.3	654 / 25.7		75MOA	75MOA			
SCOL-X22	5-30x	56mm	9.5-1.9	24.9-4.2 feet	8.3-1.4 meters		400 / 15.7	688 / 27.1		60MOA	60MOA		15yds to ∞	



Warranty



Hunting Style



Focal Plane



Tube Size



6x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



LaREE Lens



Light Transmission



Edge-to-Edge



Extra Large EYE-BOX



Water Proof



Shock Proof



Nitrogen Purged



Turret Lock



Reset to Zero



Capped Adjustment



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



7075 T6
High Performance Adjustment



Tube Sunshade



With Rings



Lens Cover

CONTINENTAL[®] HUNTING

Second Focal Plane

FEATURES

30mm Monotube

True 6x Zoom Factor

>90% Light Transmission

LaREE Lens & VePRO FMC

Etched Glass Illuminated Reticle

Extreme Precision MOA Adjustment With Zero Reset



Power Ring Throw Lever
(SCCON-TL)



Parallax Big Side Wheel
(SCCON-SW)



Metal Flip-up Cap



CONTINENTAL[®] HUNTING

1-6x24 | 1.5-9x42 | 2-12x50 | 2.5-15x56 | 3-18x50 | 5-30x56

30mm




Gordon Marsh, USA


I am happy to report the Continental scope performed perfectly on this elk hunt. I shot a bull Elk at 300 yards. The scope was great. During the hunt it also retained a perfect zero, it was bright & clear. The eye relief shooting the 375 Ruger was just fine.




RETICLES



German #4



VET-10BDC (MOA)



VECON-CDM (MOA)

SCOC-23 | 1-6x24

SCOM-23 | 1.5-9x42

SCOM-15 | 2-12x50

SCOM-38 | 2.5-15x56

SCOM-34 | 2.5-15x56

SCOL-X21 | 3-18x50

SCOL-X22 | 5-30x56

German #4

German #4

VET-10BDC

German #4

VECON-CDM

VECON-CDM

VECON-CDM



CONTINENTAL[®] TACTICAL

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-23T	1-6x	24mm	9.5-4.0	124.5-20.7 feet	42-7.0 meters		283 / 11.1	480 / 16.9		45MIL	45MIL		100yds	
SCOC-34														
SCOL-53 	3-18x	50mm	9.5-2.8	41.5-6.9 feet	13.8-2.3 meters	100 / 4.0	337 / 13.3	580 / 20.5	30mm	21.5MIL	21.5MIL	1/10MIL	10yds to ∞	6 levels 
SCOL-54 	4-24x		9.5-2.1	31.1-5.2 feet	10.4-1.7 meters		370 / 14.6	605 / 21.4		20MIL	20MIL			
SCOL-43 													15yds to ∞	
SCOL-47 	5-30x	56mm	9.5-1.9	24.9-4.2 feet	8.3-1.4 meters		400 / 15.7	630 / 22.2		16.5MIL	16.5MIL			



Warranty



Tactical Style



Focal Plane



Tube Size



6x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



LaREE Lens



Light Transmission



Edge-to-Edge



Extra Large EYE-BOX



Nitrogen Purged



Target Long Range



Water Proof



Shock Proof



Reset to Zero



Illumination



Focus Range



Side Focus



Audible Mechanical Clicks



7075 T6
High Performance Adjustment



Tube Sunshade



With Rings



Lens Cover

CONTINENTAL[®] TACTICAL

Second Focal Plane

FEATURES

30mm Monotube

True 6x Zoom Factor

>90% Light Transmission

LaREE Lens & VePRO FMC

Etched Glass Illuminated Reticle

1/10MIL Adjustment With Zero Re-set



Power Ring Throw Lever
(SCCON-TL)



Parallax Big Side Wheel
(SCCON-SW)



Metal Flip-up Cap

CONTINENTAL[®] TACTICAL

1-6x24 | 3-18x50 | 4-24x50 | 5-30x56

30mm




Continental[®]

18

VECTOR OPTICS[®]


RETICLES



VEC-T6M (MIL)



VCT-10A (MIL)



VCT-20A (MIL)

SCOC-23T | 1-6x24

SCOC-34 | 1-6x24 **FDE**

SCOL-53 | 3-18x50

SCOL-54 | 4-24x50

SCOL-43 | 4-24x50 **FDE**

SCOL-47 | 5-30x56

VEC-T6M

VEC-T6M

VCT-10A

VCT-20A

VCT-20A

VCT-20A



CONTINENTAL[®] HUNTING ED

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination	
SCOC-37	1-8x	24mm	6.5-3.0	123-15.4 feet	41-5.1 meters	100 / 4.0	284 / 11.2	493 / 17.4	30mm	140MOA	140MOA	1/2MOA	100yds	6 levels R	
SCOM-39	2-16x	44mm	6.5-2.8	61.5-7.7 feet	20.5-2.6 meters		345 / 13.6	611 / 21.6		110MOA	110MOA	1/4MOA	20yds to ∞		
SCOL-50	3-24x	56mm	8.5-2.3	41-5.1 feet	13.7-1.7 meters		376 / 14.8	736 / 26.0		80MOA	80MOA				
SCOL-51	4-32x		8.5-1.7	30.8-3.8 feet	10.3-1.3 meters		386 / 15.2	730 / 25.7		70MOA	70MOA				



Warranty



ED Glass
(Extra-Low Dispersion)



Hunting Style



Focal Plane



Tube Size



8x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



LaREE Ultra HT Lens
(High Transmittance)



Light Transmission



Edge-to-Edge



Extra Large EYE-BOX



Nitrogen Purged



Water Proof



Shock Proof



Capped Adjustment



Reset to Zero



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



7075 T6
High Performance Adjustment



Tube Sunshade



With Rings



Lens Cover

CONTINENTAL[®] HUNTING ED

Second Focal Plane

FEATURES

- 30mm Monotube
- True 8x Zoom Factor
- Extra-Low Dispersion
- >93% Light Transmission
- LaREE Lens & VePRO FMC
- Etched Glass Illuminated Reticle
- Extreme Precision MOA Adjustment With Zero Reset



Power Ring Throw Lever
(SCCON-TL)



Parallax Big Side Wheel
(SCCON-SW)




Metal Flip-up Cap

CONTINENTAL[®] HUNTING ED

1-8x24 | 2-16x44 | 3-24x56 | 4-32x56

30mm

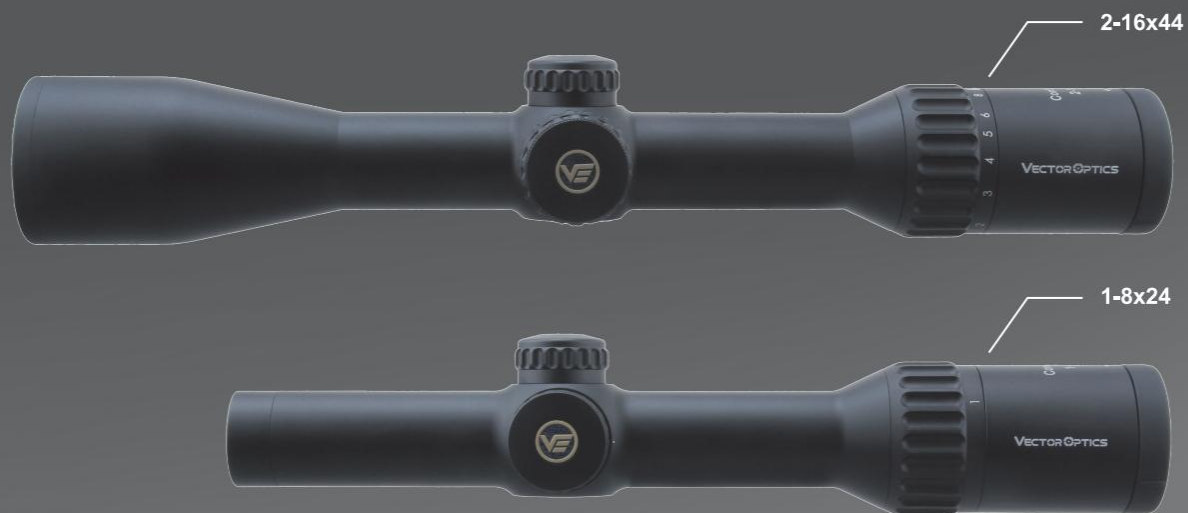


Continental[®] 22


VECTOR OPTICS



RETICLES



German #4



VET-10BDC (MOA)



VECON-CDM (MOA)

SCOC-37 | 1-8x24

SCOM-39 | 2-16x44

SCOL-50 | 3-24x56

SCOL-51 | 4-32x56

German #4

VET-10BDC

VECON-CDM

VECON-CDM



CONTINENTAL[®] TACTICAL ED

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-T37	1-8x	24mm	6.5-3.0	123-15.4 feet	41-5.1 meters	100 / 4.0	284 / 11.2	523 / 18.4	30mm	40MIL	40MIL	1/10MIL	100yds	6 levels R
SCOM-T39	2-16x	44mm	6.5-2.8	61.5-7.7 feet	20.5-2.6 meters		345 / 13.6	611 / 21.6		32MIL	32MIL			
SCOL-T50	3-24x	56mm	8.5-2.3	41-5.1 feet	13.7-1.7 meters		376 / 14.8	836 / 29.5		23MIL	23MIL		20yds to ∞	
SCOL-T51	4-32x		8.5-1.7	30.8-3.8 feet	10.3-1.3 meters		386 / 15.2	832 / 29.4		20MIL	20MIL			



Warranty



ED Glass
(Extra-Low Dispersion)



Tactical Style



Focal Plane



Tube Size



8x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



LaREE Ultra HT Lens
(High Transmittance)



Light Transmission



Edge-to-Edge



Extra Large EYE-BOX



Nitrogen Purged



Target Long Range



Water Proof



Shock Proof



Turret Lock



Reset to Zero



Zero Stop



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



7075 T6
High Performance Adjustment



Tube Sunshade



With Rings



Lens Cover

CONTINENTAL[®] TACTICAL ED

Second Focal Plane

FEATURES

- 30mm Monotube
- True 8x Zoom Factor
- Extra-Low Dispersion
- >93% Light Transmission
- LaREE Lens & VePRO FMC
- Etched Glass Illuminated Reticle
- 1/10MIL Adjustment With Zero Stop & Reset




Power Ring Throw Lever
(SCCON-TL)



Parallax Big Side Wheel
(SCCON-SW)



Metal Flip-up Cap

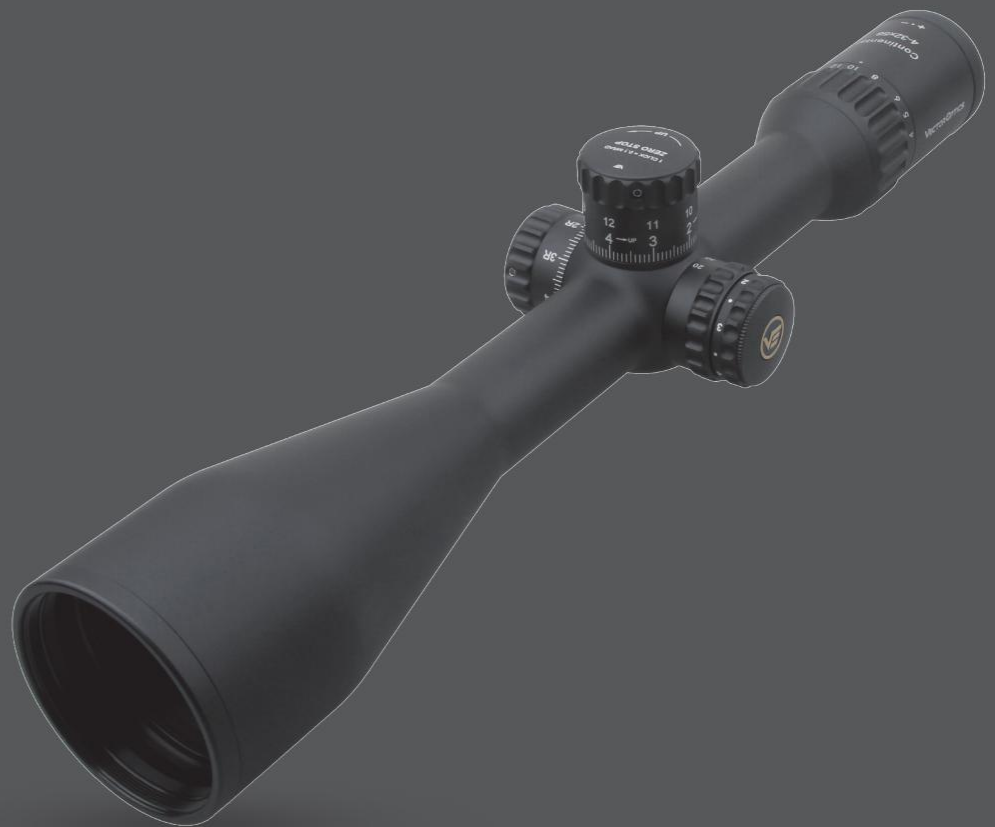


CONTINENTAL[®] TACTICAL ED

1-8x24 | 2-16x44 | 3-24x56 | 4-32x56

30mm




Continental[®] 26 VECTOR OPTICS[®]



VEC-T8M (MIL)



VTC-10A (MIL)



VTC-20A (MIL)

SCOC-T37 | 1-8x24

SCOM-T39 | 2-16x44

SCOL-T50 | 3-24x56

SCOL-T51 | 4-32x56

VEC-T8M

VCT-10A

VCT-20A

VCT-20A



VECTOR OPTICS

TAURUS 3-18X50

311ZR13823

S 3-18X50

TAURUS

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination	
SCFF-27 	1-6x	24mm	8-3.5	110-18 feet	100 / 4.0	275 / 10.8	545 / 19.2	30mm	60MIL	60MIL	1/5MIL	100yds	6 levels 	
SCFF-11 	3-18x	50mm	16.6-2.7	32.9-5.8 feet		335 / 13.2	750 / 26.5		17.5MIL	17.5MIL	1/10MIL	15yds to ∞		
SCFF-17 	4-24x		12.5-2.1	25.5-4.2 feet		380 / 15.0	770 / 27.2		15MIL	15MIL				
SCFF-14 	5-30x		56mm	11.0-1.8		20.4-3.5 feet	400 / 15.7		815 / 28.7	12MIL				12MIL
SCFF-45 	4-16x	44mm	11-2.75	24.6-6.3 feet		355 / 14.0	670 / 23.6		25MIL	25MIL				
SCFF-46 	6-24x	50mm	8.33-2.08	5.21-1.38 feet		360 / 14.2	700 / 24.7		17.5MIL	17.5MIL				
SCOC-42	1-6x	24mm	8.5-4.0	111.2-18.33 feet		270 / 10.6	548 / 19.3		40MIL	40MIL		100yds		
SCOL-45 	4-16x	44mm	10.0-2.8	26.2-6.6 feet		355 / 14.0	730 / 25.7		24MIL	24MIL		20yds to ∞		
SCOL-46 	6-24x	50mm	8.3-2.2	17.9-4.5 feet		360 / 14.2	763 / 26.9		19.5MIL	19.5MIL		10yds to ∞		



Warranty



Focal Plane



Focal Plane



Tube Size



4/6x Zoom Factor



Fully Multi-Coated



Edge-to-Edge



Water Proof



Shock Proof



Nitrogen Purged



Reset to Zero



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



With Rings



Lens Cover



Throw Lever Compatible

TAURUS

First Focal Plane

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- Long Eye Relief
- 6 Levels Illuminated
- Zero Re-set Feature



Scope Universal Big Side Wheel
(SCBSW-U1)

TAURUS 1-6x24 | 3-18x50 | 4-24x50 | 5-30x56 | 4-16x44 | 6-24x50


30mm




Taurus 30

VECTOR OPTICS®


RETICLES



VTC-CMIL (MIL)



MPX1 (MIL)



VPA-MF (MIL)

SCFF-27 | 1-6x24 **FFP**

SCFF-11 | 3-18x50 **FFP**

SCFF-17 | 4-24x50 **FFP**

VTC-CMIL

MPX1

MPX1

SCFF-14 | 5-30x56 **FFP**

SCFF-45 | 4-16x44 **FFP**

SCFF-46 | 6-24x50 **FFP**

MPX1

MPX1

MPX1

TAURUS

Second Focal Plane

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- Long Eye Relief
- 6 Levels Illuminated
- Zero Re-set Feature



Scope Universal Big Side Wheel
(SCBSW-U1)


TAURUS 1-6x24 | 4-16x44 | 6-24x50

30mm




Levan Mosiashvili, Georgia

Clear vision & resolution, which indicates the quality of vector optics. Its weight, obedient clicks, FFP&SFP. All these, taking into account the pleasure of shooting, for which it deserves great approval and gratitude.



VTC-SMIL (MIL)



MPX1 (MIL)

SCOC-42 | 1-6x24

SCOL-45 | 4-16x44

SCOL-46 | 6-24x50

VTC-SMIL

MPX1

MPX1

RETICLES



PARAGON

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOM-37	3-15x	44mm	10.4-2.9	37.2-7.7 feet	92 / 3.6	335 / 13.2	635 / 22.4	1in (25.4mm)	60MOA	60MOA	1/4MOA	10yds to ∞	6 levels 
SCOM-T37							715 / 25.2		17.5MIL	17.5MIL	1/10MIL		
SCOL-44	4-20x	50mm	10.0-2.5	27.9-5.6 feet		343 / 13.5	695 / 24.5		60MOA	60MOA	1/4MOA		
SCOL-T44							765 / 27.0		17.5MIL	17.5MIL			
SCOM-25	3-15x	56mm	8.0-3.3	37.5-7.5 feet	100 / 4.0	335 / 13.2	625 / 22.0	30mm	26MIL	26MIL	1/10MIL	15yds to ∞	
SCOL-26	5-25x		8.0-2.2	22.5-4.5 feet		365 / 14.4	670 / 23.6		18.5MIL	18.5MIL			
SCOL-27	6-30x		9.5-1.5	18.8-38 feet		400 / 15.7	700 / 24.7		16.5MIL	16.5MIL			



Warranty



Focal Plane



Hunting Style



Tube Size



Tube Size



5x Zoom Factor



VePRO FMC
(Fully Multi-Coated)



Edge-to-Edge



Nitrogen Purged



Water Proof



Shock Proof



Target Range



Capped Adjustment



Turret Lock



Reset to Zero



Zero Stop



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



Tube Sunshade



With Rings



Lens Cover



Throw Lever Compatible

PARAGON

Second Focal Plane

FEATURES

30mm | 1inch (25.4mm) Monotube

True 5x Zoom Factor

6 Levels Illumination

Wide Field Of View

90% Light Transmission

Zero Re-set & Turret Lock

LeREE Lens And VePRO FMC




Throw Lever
(SCOT-57FF)




Parallax Big Side Wheel
(SCCON-SW)

PARAGON 3-15x44 | 3-15x50 | 4-20x50 | 5-25x56 | 6-30x56


30mm | 1in (25.4mm)



German #4



VPA-2 (MIL)



VEPG-TMIL (MIL)

SCOM-37 | 3-15x44
SCOM-T37 | 3-15x44
SCOL-44 | 4-20x50
SCOL-T44 | 4-20x50
SCOM-25 | 3-15x50
SCOL-26 | 5-25x56
SCOL-27 | 6-30x56

German #4
VEPG-TMIL
German #4
VEPG-TMIL
VPA-2
VPA-2
VPA-2



MARKSMAN

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOM-04	3.5-10x	44mm	12.6-4.4	6.3°-2.1°		325 / 12.8	665 / 23.5	30mm	18MIL	18MIL	1/10MIL	10 yds to ∞	N/A
SCOL-09	10x		4.4	2.2°			630 / 22.2						
SCOL-11	6-25x	50mm	8.3-2.0	3.5°-0.9°	75-105 / 3.0-4.1	360 / 14.2	725 / 25.6		15MIL	15MIL			
SCOL-15	4.5-18x		11-2.7	4.4°-1.1°		350 / 13.8	700 / 24.7						



Warranty



Focal Plane



Tube Size



Fully Multi-Coated



Nitrogen Purged



Fog Resistance



Water Resistance



Shock Proof



Turret Lock



Reset to Zero



Focus Range



Side Focus



Audible Mechanical Clicks



With Rings



Honeycomb Sunshade



Lens Cover

MARKSMAN

Second Focal Plane

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- Turret Lock System
- Zero-Reset Feature
- Wide Field Of View
- 1/10 MIL Low Profile Turret



Scope Universal Big Side Wheel
(SCBSW-U1)

MARKSMAN

3.5-10x44 | 10x44 | 4.5-18x50 | 6-25x50


30mm



Marksman
40

VECTOR OPTICS®

RETICLES



MPN-1 (MIL)

SCOM-04 | 3.5-10x44

MPN-1

SCOL-09 | 10x44

MPN-1

SCOL-11 | 6-25x50

MPN-1

SCOL-15 | 4.5-18x50

MPN-1

Kanit Sataman, Thailand

The Vector Optics Marksman is the most valuable choice for those who just begin their shooting sports and small game. It has all the necessary features such as first focal plane scope, good glass, MRAD units and a very tactical turret mechanic.



VEYRON

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-43	2-8x	32mm	16.0-4.0	52.4-13.1 feet		220 / 8.7	425 / 15.0		23MIL	23MIL		100yds	6 levels R
SCOM-24							500 / 17.6						N/A
SCOM-40	3-12x		14.6-3.6	35.1-8.7 feet		245 / 9.7	515 / 20.3						6 levels R
SCFF-21 FFP							500 / 17.6		17.5MIL	17.5MIL			N/A
SCOL-48							545 / 21.5						6 levels R
SCFF-22 FFP	4-16x	44mm	11-2.75	26.2-6.55 feet	90-85 / 3.5-3.4	270 / 10.6	530 / 18.7	30mm			1/10 MIL	10yds to ∞	N/A
SCFF-38 FFP													6 levels R
SCOL-49							595 / 23.4						
SCFF-23 FFP	6-24x		7.3-1.8	17.5-4.3 feet		295 / 11.6	580 / 20.5		14.5MIL	14.5MIL			N/A
SCFF-37 FFP													6 levels R
SCOM-41	10x		14.6-3.6	10.5 feet		245 / 9.7	470 / 16.6		17MIL	17MIL			N/A



Warranty



Focal Plane



Focal Plane



Tube Size



4x Zoom Factor



Fully Multi-Coated



Edge-to-Edge



Water Resistance



Shock Proof



Nitrogen Purged



Focus Range



Extra Short



Turret Lock



Reset to Zero



Side Focus



Illumination



With Rings



Honeycomb Sunshade



Flip-up Cap

VEYRON

First Focal Plane | Second Focal Plane

FEATURES

- 30mm Monotube
- 4x Zoom Factor
- Fully-Multi Coated
- Turret Lock System
- Zero-Reset Feature
- Ultra Compact Optics



VEYRON


2-8x32 | 3-12x44 | 4-16x44 | 6-24x44 | 10x44

30mm




Karl Orange, England

Unmatched Value, Quality and Craftmanship



MPR-V5 (MIL)



MPR-4 (MIL)

RETICLES

SCOM-41 | 2-8x32
SCOM-24 | 3-12x44
SCOM-40 | 3-12x44 IR
SCFF-21 | 3-12x44 **FFP**
SCOL-48 | 4-16x44 IR

MPR-V5
MPR-4
MPR-V5
MPR-4
MPR-V5

SCFF-22 | 4-16x44 **FFP**
SCFF-38 | 4-16x44 IR **FFP**
SCOL-49 | 6-24x44 IR
SCFF-23 | 6-24x44 **FFP**
SCFF-37 | 6-24x44 IR **FFP**
SCOC-43 | 10x44

MPR-4
MPR-V5
MPR-V5
MPR-4
MPR-V5
MPR-V5



FORESTER

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-28	1-4x	24mm	24-6.0	73.3-23.6 feet	110-90 / 4.3-3.5	260 / 10.2	390 / 13.8	30mm	100MOA	100MOA	1/2MOA	50yds	N/A
SCOC-03	1-5x		16.0-5.2	73.3-19.9 feet	115-95 / 4.5-3.7	265 / 10.4	415 / 14.6		60MOA	60MOA			11 levels R
SCOC-03II						260 / 10.2	425 / 15.0						
SCOC-32													
SCOC-38													
SCOC-39	1-8x		16-3.5	105-18.9 feet	85-75 / 3.3-3.0	262 / 10.3	580 / 20.5		>30MOA	>30MOA			
SCOM-35	3-9x	40mm	13.3-4.4	38.8-13.1 feet	75-70 / 3.0-2.8	295 / 11.6	430 / 15.2		50MOA	50MOA	N/A		
SCOM-02	2-10x		20-4.0	41.9-10.47 feet	100-90 / 4.0-3.5	340 / 13.4	500 / 17.6		60MOA	60MOA	1/4MOA	100yds	11 levels R
SCOM-16	3-15x	50mm	16.7-3.3	36.2-7.2 feet	95-85 / 3.7-3.3	385 / 15.1	575 / 20.3						



Warranty



Focal Plane



Tube Size



Fully Multi-Coated



Tactical Style



Edge-to-Edge



Water Resistance



Shock Proof



Nitrogen Purged



Capped Adjustment



Turret Lock



Reset to Zero



Illumination



Audible Mechanical Clicks



With Rings



Lens Cover



Throw Lever Compatible

FORESTER

Second Focal Plane

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- Wide Field Of View
- Edge-To-Edge Image
- Extreme Long Eye Relief
- Zero Reset & Turret Lock Features



FORESTER

1-4x24 | 1-5x24 | 1-8x24 | 3-9x40 | 2-10x40 | 3-15x50

30mm



3-15x50



1-5x24 GenII




Forester

48


VECTOR OPTICS®

RETICLES




Yuki 'OSMI' Sumimura, *Japan*

You will be amazed by the clear, edgeless view that is beyond its price, and the marvelous depth of field that spreads in front of you. Forester will change your way to think about shooting.



VFD-3 (MOA)



VFD-2 (MOA)

SCOC-28 | 1-4x24

SCOC-03 | 1-5x24

SCOC-03II | 1-5x24 GenII

SCOC-32 | 1-5x24 GenII **FDE**

SCOC-38 | 1-8x24

SCOC-39 | 1-8x24 **FDE**

SCOM-35 | 3-9x40

SCOM-02 | 2-10x40

SCOM-16 | 3-15x50

VFD-3

VFD-2

VFD-2

VFD-2

VFD-2

VFD-2

VFD-3

VFD-2

VFD-2



SENTINEL

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination	
SCOL-13	4-16x	50mm	3.1-12.5	6.5-26.2feet	100-80 / 3.9-3.1	340 / 13.4	750 / 26.5	30mm	55MOA	55MOA	1/4MOA	12yds to ∞	Stepless R & G	
SCOL-14	6-24x		2.1-8.3	4.4-14.8 feet		385 / 15.1	755 / 26.6		50MOA	50MOA	1/8MOA	10yds to ∞		
SCOL-05	8-32x		6.2-1.5	3.5-13.9 feet		405 / 15.9	780 / 27.5		45MOA	45MOA				
SCOL-07	10-40x		5.0-1.25	2.6-10.5 feet	92-85 / 3.6-3.3		790 / 27.9		50MOA	50MOA	1/8MOA	10yds to ∞	N/A	
SCOL-34							775 / 27.3							



Warranty



Focal Plane



Tube Size



4x Zoom Factor



Fully Multi-Coated



Edge-to-Edge



Water Resistance



Shock Proof



Nitrogen Purged



Target Range



Focus Range



Side Focus



Turret Lock



Reset to Zero



Illumination



Audible Mechanical Clicks



With Rings



Honeycomb Sunshade



Flip-up Cap

SENTINEL

Second Focal Plane

FEATURES

30mm Monotube

Side Focus

4x Zoom Factor

Fully-Multi Coated

Wide Field Of View

Zero Reset and Turret Lock



Scope Universal Big Side Wheel
(SCBSW-U1)

SENTINEL


4-16x50 | 6-24x50 | 8-32x50 | 10-40x50

30mm




Sentinel 52

VECTOROPTICS®



MPR-3 (MOA)



COM-25M (MOA)

SCOL-13 | 4-16x50

SCOL-14 | 6-24x50

SCOL-05 | 8-32x50

SCOL-07 | 10-40x50

SCOL-34 | 10-40x50

MPR-3

MPR-3

MPR-3

MPR-3

COM-25M



MINOTAUR

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOL-36	10-50x		4.0-1.0	11.0-2.2 feet			960 / 33.9						
SCOL-39													
SCOL-37	12-60x	60mm	3.5-1.0	9.15-1.83 feet	96-95 / 3.8-3.7	425 / 16.7		34mm	40MOA	40MOA	1/8 MOA	10yds to ∞	10 levels +1 NV
SCOL-40													
SCOL-38	46x		1.2	2.75 feet			945 / 33.3						
SCOL-41													



Warranty



Focal Plane



Tube Size



5x Zoom Factor



Fully Multi-Coated



Water Resistance



Shock Proof



Nitrogen Purged



Tactical Style



Target Long Range



Digital User Control



Focus Range



Side Focus



Zero Stop



Turret Lock



Reset to Zero



Illumination



Audible Mechanical Clicks



With Rings



Tube Sunshade



Flip-up Cap

MINOTAUR

Second Focal Plane

FEATURES

34mm Monotube

Fully-Multi Coated

80 Clicks Per Round

Parallax Min Starts From 10yds

1/8 MOA Adjustment With Zero-Stop

11 Levels Red Illumination (1 NV Level)


Designed For LR, XLR And Precision Competition Shooting



Scope Universal Big Side Wheel
(SCBSW-U1)

MINOTAUR 10-50x60 | 12-60x60 | 46x60

34mm

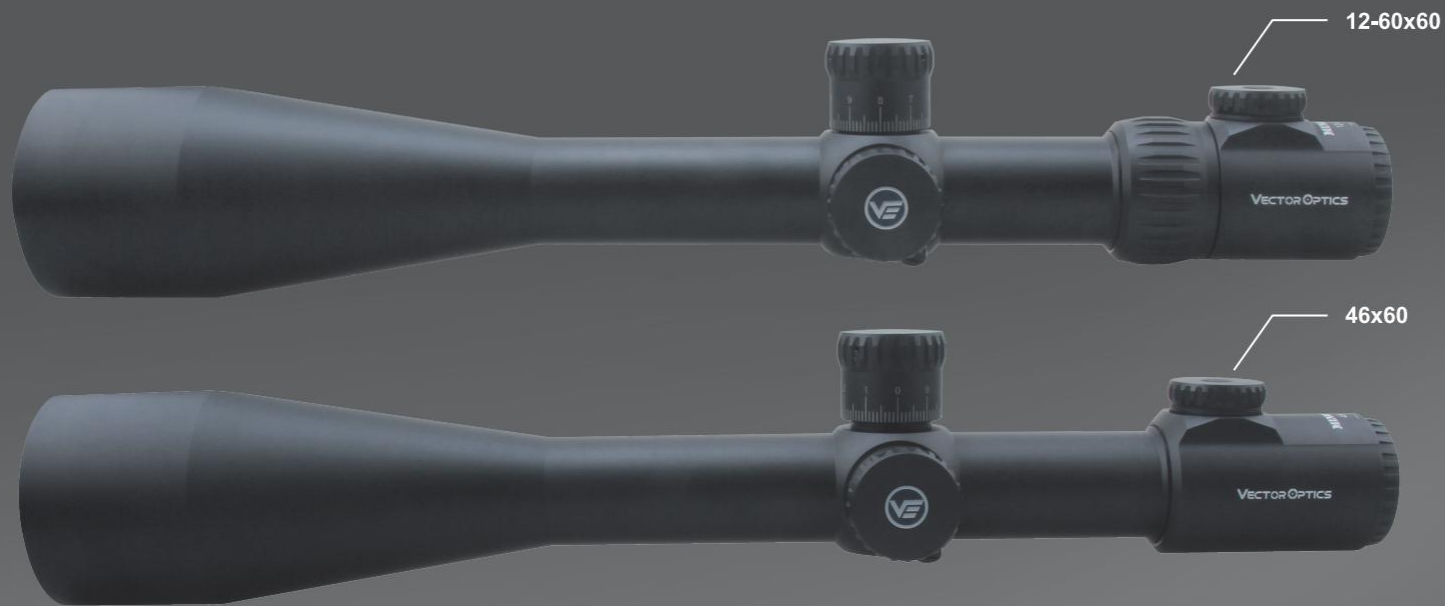

Minotaur

56

VECTOR OPTICS®




Tomasz Kocemba, Poland


It's fairly large with the 60mm objective and 34mm tube, but not overly large like some other scopes offering such great magnification.

The image is bright and the optical quality is surprisingly good for the price. It introduces the shooter to a new world of x60 magnification.

Fine reticle, with illuminated, well-calibrated central dot allows you to aim with accuracy like never before. The reticle markings for holdover or windage designed to keep that sight picture as clean and uncluttered as possible, and are good for most of long distance shots.



VETD-LR (MOA)



VEMP-LR (MOA)

RETICLES

SCOL-36 | 10-50x60 DOT

SCOL-39 | 10-50x60 MFL

SCOL-37 | 12-60x60 DOT

SCOL-40 | 12-60x60 MFL

SCOL-38 | 46x60 DOT

SCOL-41 | 46x60 MFL

VETD-LR

VEMP-LR

VETD-LR

VEMP-LR

VETD-LR

VEMP-LR



CONSTANTINE

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOC-36	1-6x	24mm	10.5-4.0	116.2-19.2 feet	100 / 3.9	264 / 10.4	530 / 18.6	30mm	120MOA	120MOA	1/2 MOA	100yds	11 levels  Fiber
SCOC-27	1-8x		9.0-3.0	125.6-14.8 feet	100 / 3.9	263 / 10.3	500 / 17.6		>50MIL	>50MIL	1/10 MIL		11 levels  Fiber
SCFF-32 			8.0-3.0	116.6-14.8 feet	95 / 3.7	273 / 10.7							
SCOC-31					95-90 / 3.7-3.5	280 / 11.0							
SCOC-35	1-10x		10.0-3.0	113.9-11.5 feet	90 / 3.5	268 / 10.5	540 / 19.0		120MOA	120MOA	1/2 MOA		11 levels  Fiber
SCFF-42 													11 levels  Fiber



Warranty



Focal Plane



Focal Plane



8/10x Zoom Factor



Fiber Dot



Tactical Style



Tube Size



Fully Multi-Coated



Water Proof



Shock Proof



Edge-to-Edge



Short-range Self-defense



Capped Adjustment



Nitrogen Purged



Reset to Zero



Illumination



Audible Mechanical Clicks



With Rings



Flip-up Cap



Throw Lever Compatible

CONSTANTINE

First Focal Plane | Second Focal Plane

FEATURES

30mm Monotube

True 1x Power

Edge-To-Edge Image

Low Power Variable Optics


All Fields Of Application For Hunting, Sporting & Competition



CONSTANTINE

1-6x24 | 1-8x24 | 1-10x24

30mm

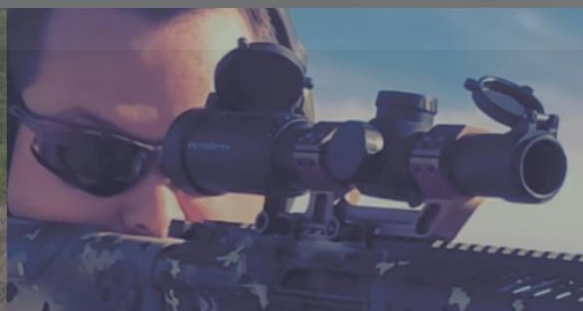


Constantine


60

VECTOR OPTICS®


RETICLES




VECNS-G4F (MOA)



VOS-EHT (MIL)



VOF-EHT (MIL)



VOS-TMOA (MOA)

SCOC-36 | 1-6x24

SCOC-27 | 1-8x24

SCFF-32 | 1-8x24 **FFP**

SCOC-31 | 1-10x24

SCOC-35 | 1-10x24

SCFF-42 | 1-10x24 **FFP**

VECNS-G4F

VOS-EHT

VOF-EHT

VOS-TMOA

VECNS-G4F

VOS-TMOA



MATIZ

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination
SCOM-26	2-7x	32mm	16.0-4.6	8.0°-2.25°	108-98 / 4.2-3.9	280 / 11.0	375 / 13.2	1in (25.4mm)	60MOA	60MOA	1/4MOA	100yds	N/A
SCOM-33													
SCOM-27													
SCOM-32	3-9x	50mm	6.3°-2.2°	310 / 12.2	500 / 17.6								
SCOM-28													
SCOM-29						4-12x	40mm		10.0-3.3	4.5°-1.4°	108-98 / 4.2-3.9	520 / 18.3	60MOA
SCOL-28	6-18x	44mm	7.3-2.4	2.5°-1.1°	102-96 / 4.0-3.8	542 / 19.1	50MOA		50MOA				



Warranty



Focal Plane



Tube Size



Hunting Style



3/3.5x Zoom Factor



Fully Multi-Coated



Water Resistance



Shock Proof



Nitrogen Purged



Focus Range



Side Focus



Edge-to-Edge



Capped Adjustment



Reset to Zero



Audible Mechanical Clicks



With Rings



Lens Cover

MATIZ

Second Focal Plane

FEATURES

1 Inch (25.4mm) Monotube

3x Zoom Factor

Fully-Multi Coated

Edge-To-Edge Image


Long Eye Relief

Wide Filed Of View




MATIZ 2-7x32 | 3-9x40 | 3-9x50 | 4-12x40 | 6-18x44


1in (25.4mm)

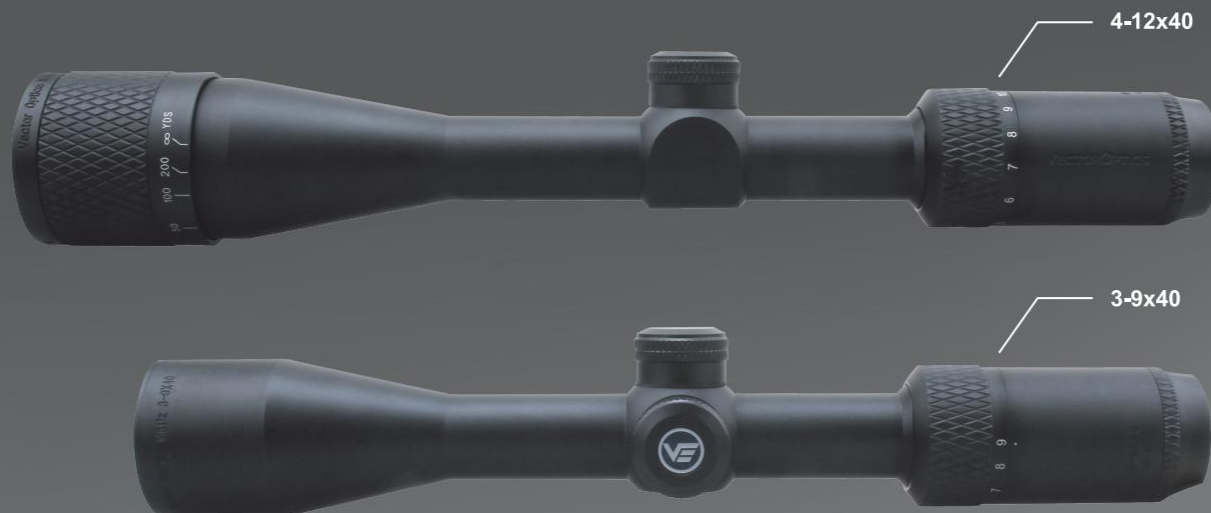


RETICLES




Duplex (MOA)




VOW-MOA (MOA)



VMT-MIL (MIL)



German #4 (MOA)



VOW-10BDC (MOA)

SCOM-26 | 2-7x32

SCOM-33 | 2-7x32 MOA

SCOM-27 | 3-9x40

SCOM-32 | 3-9x40 MIL

SCOM-28 | 3-9x50

SCOM-29 | 4-12x40

SCOL-28 | 6-18x44

Duplex

VOW-MOA

Duplex

VMT-MIL

German #4

VOW-10BDC

VOW-10BDC



HUGO

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Illumination		
SCOM-30	3-12x	44mm	14.6-4.0	31.5-7.9 feet		325 / 12.8	588 / 20.7	1in (25.4mm)	60MOA	60MOA	1/4MOA	10yds to ∞	N/A		
SCOM-31							616 / 21.7						11 levels  & 1 NV		
SCOL-29	4-16x	44mm	11-2.7	21.1-5.3 feet	105-100 / 4.1-3.9	345 / 13.6	641 / 22.6		50MOA	50MOA			1/4MOA	10yds to ∞	N/A
SCOL-30							650 / 22.9								11 levels  & 1 NV
SCOL-31	6-24x	50mm	8.3-2	15.8-4.0 feet		360 / 14.2	655 / 23.1		40MOA	40MOA			1/4MOA	10yds to ∞	N/A
SCOL-32							673 / 23.7								11 levels  & 1 NV



Warranty



Focal Plane



Hunting Style



Tube Size



4x Zoom Factor



Fully Multi-Coated



Edge-to-Edge



Water Resistance



Shock Proof



Nitrogen Purged



Target Range



Digital User Control



Turret Lock



Reset to Zero



Focus Range



Side Focus



Illumination



Audible Mechanical Clicks



Tube Sunshade



With Rings



Flip-up Cap

HUGO

Second Focal Plane

FEATURES

1 Inch (25.4mm) Monotube

4x Zoom Factor

Long Eye Relief

Fully-Multi Coated

Wide Field of View

Side Focus Min 10 Yds

Turret Lock & Zero Reset




Scope Universal Big Side Wheel
(SCBSW-U1)

HUGO

3-12x44 | 4-16x44 | 6-24x50

1in (25.4mm)

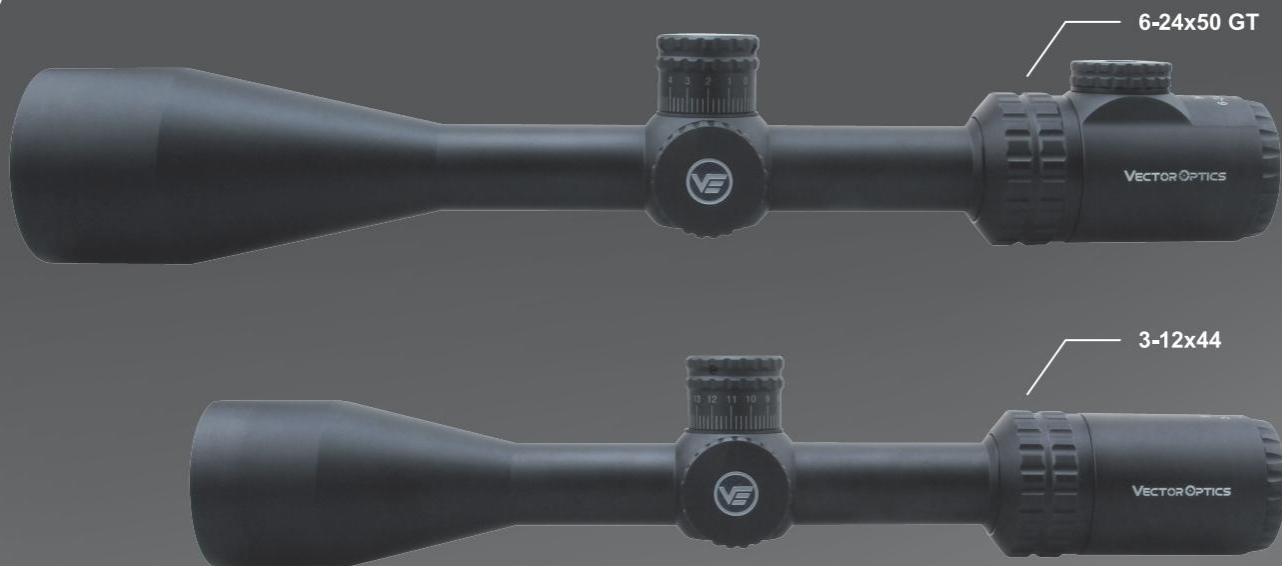

Hugo
68


VECTOR OPTICS®

RETICLES




Karl Orange, *England*

Big on quality, small on price



VOW-10BDC (MOA)



VOI-10BDC (MOA)

SCOM-30 | 3-12x44

SCOM-31 | 3-12x44 GT

SCOL-29 | 4-16x44

SCOL-30 | 4-16x44 GT

SCOL-31 | 6-24x50

SCOL-32 | 6-24x50 GT

VOW-10BDC

VOI-10BDC

VOW-10BDC

VOI-10BDC

VOW-10BDC

VOI-10BDC

GRIMLOCK

1-6x24 | 1-4x24

FEATURES


- 30mm Monotube
- Fully-Multi Coated
- 6 Levels Illumination
- Zero Re-set Feature
- Capped 1/2MOA Adjustment




VECTOROPTICS®

69

Grimlock



VTC-3 (MOA)



VTC-DND (MOA)



SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCOC-13II	1-6x	24mm	10.5-3.9	116.6-19.2 feet	96-95 / 3.8-3.7	265 / 10.4	500 / 17.6	30mm	60MOA	60MOA	1/2MOA	100yds	VTC-3	6 levels 
SCOC-40	1-4x		11-5	105.8-26.2 feet	105-100 / 4.1-3.9	251 / 9.9							VTC-DND	

MUSTANG

FEATURES


30mm Monotube

Fully-Multi Coated


1/2MOA Adjustment

Edge-To-Edge Image

Turret Lock & Zero Reset



M-4RD (MOA)



Chevron (MOA)




Mustang
70

VECTOR OPTICS®

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCFF-36 FFP	1-4x	24mm	11.0-5.0	105.8-26.2 feet	105-100 / 4.1-3.9	255 / 10.0	485 / 17.1	30mm	60MOA	60MOA	1/2MOA	100yds	M-4RD	6 levels R
SCOC-29		30mm				250 / 9.9	725 / 25.6						Chevron	R & G & B

GRIZZLY

1-4x24 | 3-12x56




German #4

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- 11 Levels Illumination
- 1/4MOA Capped Adjustment

EVEREST



MPTR-2 (MOA)

FEATURES

- 30mm Monotube
- Fully-Multi Coated
- 1/4MOA Adjustment
- Parallax Min From 10yds



Legat Werner, Austria

The right scope for a young hunter on a small budget. It easily tolerates calibers up to 30.06 and has crystal-clear and bright optics with a very usable red dot. I use it on an air rifle (Gamo, 45 joules) where even expensive brands can't withstand the recoil. This is where the Grizzly shows its quality.

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCOM-09	3-12x	56mm	16.6-4.2	36.7-9.2 feet	105-100 / 4.1-3.9	330 / 13.0	700 / 24.7	30mm	60MOA	60MOA	1/4MOA	100yds	German #4	11 levels
SCOC-41	1-4x	24mm	11-5	105.8-26.2 feet		251 / 9.9	472 / 16.6				1/2MOA			
SCOL-06II	3-18x	50mm	10-2.8	38.2-6.2 feet	95-92 / 3.7-3.6	355 / 14.0	740 / 26.1				1/4MOA	10yds to ∞	MPTR-2	N/A

ORION


FEATURES

30mm Monotube


Fully-Multi Coated

Turret Lock Feature

Parallax Min From 10yds



PCD-RDY (MOA)



VE-RND (MIL)



VE-RDF (MOA)



4-16x44 MAX



4-16x44



SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCOL-42	4-16x	44mm	11.0-2.7	21.1-5.3 feet	105-100 / 4.1-3.9	328 / 12.9	675 / 23.8	30mm	50MOA	50MOA	1/4MOA	10yds to ∞	PCD-RDY	6 levels R
SCOL-35							660 / 23.3		14.5MIL	14.5MIL	1/10MIL		VE-RND	N/A
SCFF-44 FFP	6-24x	50mm	8.3-2.1	19.6-4.9 feet	85-80 / 3.5-3.1								VE-RDF	6 levels R




MICRO PRISM SCOPE

PARAGON


1x16 | 3x18 | 4x24

FEATURES

- Fully-Multi Coated
- IP67 Waterproof
- Edge To Edge Image
- Long Eye Relief
- 11 Levels Red Illumination
- Crystal Clear Prism Scope



VEP-CDR (MOA)



VEPS-MBR (MOA)



SCPS-M01 | 1x16



SCPS-M03 | 3x18



SCPS-M04 | 4x24

(Red Dot Platform)

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Center Height (mm / inch)	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
SCPS-M01	1x	16mm	15	76.3 feet	76 / 3.0	75 / 3.0	225 / 7.9	36 / 1.41	>40MOA	>40MOA	1MOA	100yds	VEP-CDR	10 levels R
SCPS-M03	3x	18mm	6	38.8 feet	68 / 2.7	77 / 3.0							VEPS-MBR	
SCPS-M04	4x	24mm	6	88.8 feet		81 / 3.2	335 / 11.8							



MAGNIFIER

MAVERICK & PARAGON

MAVERICK

SERIES



Maverick 5x26 | SCMF-15

PARAGON

SERIES



Paragon 3x18 Micro | SCMF-33

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Center Height (mm / inch)	
SCMF-10 Maverick	3x	26mm	7.0mm	49 feet	14.9	60 / 2.4	108 / 4.2	325 / 11.7	36 / 1.4	
SCMF-11 Maverick								440 / 15.5 (Steel Mount)	39 / 1.5	
SCMF-14 Maverick	4x		6.5mm	26 feet	7.9	75 / 3.0	115 / 4.5	230 / 8.1	36 / 1.4	
SCMF-15 Maverick	5x			20.3 feet	6.2	70 / 2.8	118 / 4.6			
SCMF-31 Maverick	3x	22mm	7.0mm	49 feet	14.9	69 / 2.7	103 / 4.1	290 / 10.2		
SCMF-32 Maverick							80 / 3.1	270 / 9.5		
SCMF-41 Maverick										
SCMF-33 Paragon	5x	18mm	6.0mm	39 feet	11.9	67 / 2.6	70 / 2.8	215 / 7.6		
SCMF-34 Paragon		30mm		23 feet	7.0		93 / 3.7	250 / 8.8		



EXPLORE THE NATURE

SPOTTING SCOPE | RANGE FINDER | BINOCULAR

FORESTER 20-60x60

FEATURES

- Fully-Multi Coated
- Sharp Clear Image
- Porro/BAK-4 Prism
- ABS Body Covered With Rubber
- Side Focus
- With Tripod



20x



60x



Spotting Scope

78


VECTOR OPTICS®

SKU	Magnification	Objective Lens Dia.	Prism Type	Focus Type	Exit Pupil (mm)	F.O.V (@1000yds)	Resolution Center (Axis)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)
SCSS-01	20-60x	60mm	Porro / BAK-4	Prismatic	3.0-1.0	100-50 feet	3.99 SOA (60X Center)	16.5-13 / 0.65-0.51	350 / 13.8	730 / 25.8

RANGE FINDER

FEATURES

- Fully-Multi Coated
- Lightning Fast Response
- Portable Palm-in-Hand Size
- Scan Mode For Multiple Targets

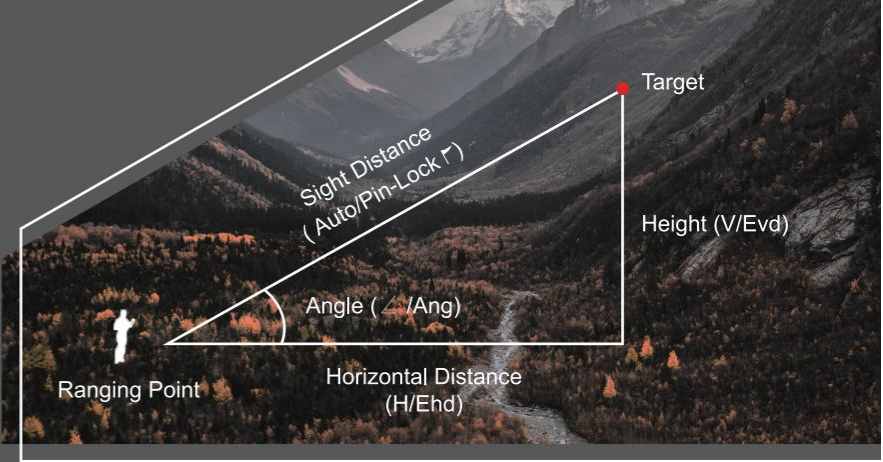

VECTOROPTICS®

79

Range Finder




Forester 6x21 | SCRF-B08



Forester 6x21 GenII | SCRF-16



Paragon 6x25 GenII | SCRF-20



Paragon 6x21 GenII | SCRF-S20

DIGITAL BALLISTIC

SKU	Magnification	Objective Lens Dia.	Ranging Distance (m / yds)	Ranging Response Time(S)	Exit Pupil (mm)	Field of View	Display	Size (mm / inch)	Weight (net) (g / oz)	Battery Type
SCRF-B08	6x	21mm	5-750 / 6-800	0.3	15	6°	OLED	98.5x77x37 / 3.8x3.0x1.4	125 / 4.4	CR2
SCRF-16			5-1500 / 5-1600	0.2			LCD		130 / 4.6	
SCRF-20		25mm	5-1850 / 5-2000	0.25	14	7°	105x76x42 / 4.1x3.0x1.6	180 / 6.3		
SCRF-S20		21mm	6-1850 / 6-2000	0.1	15	6°		OLED	150 / 5.3	

BINOCULARS

FEATURES

- Center Focus
- IPX6 Waterproof
- Fully-Multi Coated
- Reinforced Polycarbonate
- Phase Correction Coating

ED Edition Coming Soon



Forester 10x42 | SCBO-02



Sentinel 8x25 | SCBO-11



Paragon 8x42 | SCBO-03


SKU	Magnification	Objective Lens Dia.	Optical Structure	Type of Prism	Exit Pupil (mm)	Field of View	Size (mm / inch)	Weight (net) (g / oz)
SCBO-11 Sentinel	8x	25mm	5 Groups 7 Lens	BAK4	3.1	6.8°	107x106x34 / 4.2x4.2x1.3	285 / 10.0
SCBO-01 Forester	8x	42mm	4 Groups 6 Lens		5.1	6.5°	147x53x126 / 5.8x2.0x5.0	620 / 21.9
SCBO-02 Forester	10x				4.1	5.8°	144x53x126 / 5.7x2.0x5.0	560 / 19.8
SCBO-03 Paragon	8x	42mm	5 Groups 7 Lens		5.1	6.6°	147x53x126 / 5.8x2.0x5.0	685 / 24.2
SCBO-04 Paragon	10x				4.1	6.3°		675 / 23.8

FRENZY


RED DOT SIGHT

RED DOT FOOTPRINT


TEK™




MOJ™

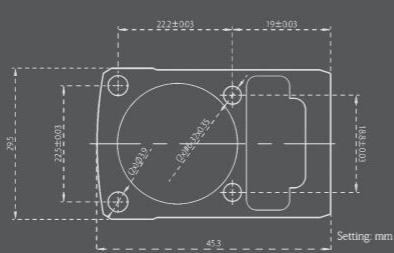


MAG™

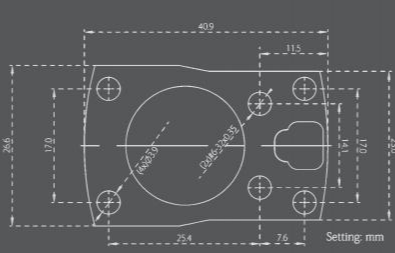

MAG-S™

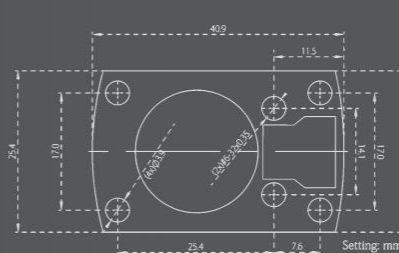


VOD™




FRENZY

FEATURES


- Premier Lens Coating
- 50000 Hours Battery Runtime For The Weakest Visible Dot
- IP67 Water Proof, 6061-T6 Aluminum Alloy Housing
- Slim & Low Profile, Snag-Free Design, Sharp Dot Ensured
- Pistol Applications with Various Standard Industrial Footprints



3MOA RED Dot



5MOA GREEN Dot



6MOA RED Dot



SKU	Reticle	Finish	Auto Light Sense	Motion Sensor	Lens Dia.	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Footprint	Dot Intensity	Battery Type			
SCRD-19II	3MOA Dot	Black Matte	N/A	N/A	17x24mm		26 / 0.9	>45MOA	>45MOA	TEK	8 levels R & 2 NV	CR2032			
SCRD-F19II		FDE													
SCRD-G19II	5MOA Dot				46 / 1.8		8 levels G & 2 NV								
SCRD-35	3MOA Dot	Black Matte			20x28mm		26 / 1.0				8 levels R & 2 NV				
SCRD-40	6MOA Dot														

1x22x26



Crosshair Circle



Frenzy



Eurico Auler, Brasilia

Due to Vector Optics, we have today an excellent model of red dot, Frenzy, with its dot presentation technology, has been shown to be resistant, effective, and reliable, consolidating the great quality and best cost-benefit in the current market.

FRENZY-S

» 1x17x24



» 1x16x22




(Polymer)



SKU	Reticle	Finish	Direct Bulb	Auto Light Sense	Motion Sensor	ON / OFF	Objective Lens Dia.	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Footprint	Dot Intensity	Battery Type
SCRD-43	3MOA Dot	Black Matte	Yes	N/A	Yes	Yes	17x24mm	18 / 0.6		>45MOA	>45MOA	MAG	8 levels  & 2 NV	
SCRD-F43		Coyote FDE												
SCRD-G43	5MOA Dot													
SCRD-M43	Multi Reticles	Black Matte												
SCRD-52														CR2032
SCRD-53		Coyote FDE												
SCRD-54		Chrome Plated						41 / 1.6		>45MOA	>45MOA			
SCRD-55		Golden Plated											Automatic	
SCRD-49	3MOA Dot	Black Matte					16x22mm		12 / 0.4	MAG-S				
SCRD-56		Coyote FDE												
SCRD-50														
SCRD-62		Black Matte					17x24mm		18 / 0.6	MAG	8 levels  & 2 NV	CR1632		
									24 / 0.85					

1x22x32



3MOA Red Dot



VECTOROPTICS®

85

Frenzy





MAVERICK

RED DOT SCOPE



Warranty



Hunting Style



Tactical Style



Dot Size



Capped Adjustment



Battery Side Loaded



Short-Range Self-defense



Illumination



Water Proof



Shock Proof



Night Vision Dot Compatible



Fog Resistance



Audible Mechanical Clicks



Digital User Control



Lens Cover

MAVERICK

FEATURES

Unlimited Eye Relief

Compact, Solid And Light Weight

Suitable For AR Platform



SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
SCRD-12	3MOA	22mm	Free	76 / 3.0	185 / 6.5	>45MOA	>45MOA	1MOA	1x	11 levels R	CR2032
SCRD-12II											
SCRD-GY12											
SCRD-41											
SCRD-42											
SCRD-38	3MOA	20mm	Free	68 / 2.7	140 / 4.9	>45MOA	>45MOA	1MOA	1x	10 levels R	CR2032
SCRD-39											
SCRD-51											
SCRD-60											
SCRD-61											

SCRAPPER

RED DOT SCOPE



Warranty



Hunting Style



Tactical Style



Dot Size



Capped Adjustment



Battery Side Loaded



Short-range Self-defense



Multi-Reticle



Solar Panels



Water Proof



Shock Proof



2 Mins Auto Shut Down



Motion Sensor(MOS)



Illumination



Direct Ultra Bright Source



Large Window



Premier & Protective
(Multi Coatings)



Parallax Free



Night Vision Dot Compatible



Fog Resistance



Audible Mechanical Clicks



Digital User Control



Lens Cover

SCRAPPER

FEATURES

- >50000 Hours Battery Runtime
- Motion Sensor Feature
- Parallax <1 MOA
- Direct Bulb 2MOA Dot Size Without Flicker
- For All Application Tactics, Hunting & Sporting



Ohji Senba, Japan

It's not inferior to the products of the world's most famous brands, but rather superior. The clear 2MOA size dots with the direct bulb are very easy to see. And thanks to the sensitive motion sensor, I don't have to worry about turning them on and off.



SCRD-SM46

SCRD-SM45



Solar Power Engaged



Multi Reticles



SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
SCRD-45		22mm		64 / 2.5	140 / 4.9						
SCRD-46		25mm		70 / 2.7	190 / 6.7						
SCRD-47	2MOA	29mm	Free	80 / 3.1	200 / 7.1	>45MOA	>45MOA	1MOA	1x	8 levels R & 2 NV	CR2032
SCRD-SM45		22mm		65 / 2.52	143 / 5.0						
SCRD-SM46		25mm		65 / 2.52	143 / 5.0						

CENTURION

SCRD-33 | 1x20



SCRD-34 | 1x30



NAUTILUS

SCRD-D26 | 1x30



SCRD-26II | 1x30



VECTOR OPTICS®

91

Red Dots

FEATURES

- 3 MOA Dot Size
- 7 Levels & 1 NV Dot Intensity

FEATURES

- On/Off Switch
- 3 MOA Dot Size
- Turret Adjust System
- 11 Levels Red Dot Intensity

SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
SCRD-33	3MOA	20mm	Free	69 / 2.7	175 / 6.2	>60MOA	>60MOA	1MOA	1x	7 levels R & 1 NV	AAA
SCRD-34				67 / 2.6	170 / 6.0						CR2032
SCRD-26II		30mm		110 / 4.3	270 / 9.5					11 levels R	AAA
SCRD-D26	Multi Reticles			98 / 3.9	270 / 9.5					7 levels R & 2 NV	

CONDOR

SCRD-03 | 2x42



WRAITH

SCRD-17 | 1x22x33



FEATURES

- 5 MOA Dot Size
- 5 Levels Red & Green Illumination
- 2 Times Magnification


FEATURES

- 3 MOA Dot Sight
- 6 Levels Red Dot Intensity + 2 Levels NV
- Available in Picatinny Mount

SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net, g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
SCRD-03	5MOA	42mm	Free	163 / 6.4	430 / 15.2	>60MOA	>60MOA	1MOA	2x	5 levels R & G	CR2032
SCRD-17	3MOA	22x33mm		66 / 2.6	115 / 4.0				1x	6 levels R + 2 levels NV	

OMEGA

SCRD-04SI | 1x27x39

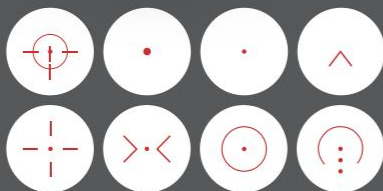

SCRD-48 | 1x23x35



FEATURES

Multi Reticles Patterns

6 Levels **Green** & **Red** Dot Intensity

Available in Picatinny Mount

VECTOROPTICS®

93

Red Dots

SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
SCRD-04SI	Multi Reticles	27x39mm	Free	110 / 4.1	260 / 9.2	>60MOA	>60MOA	1MOA	1x	6 levels R & G	LIR2032
SCRD-48		23x35mm		88 / 3.5	190 / 6.7						CR2032





RAIL MOUNT

PISTOL SIGHT MOUNT PLATE



SCRDM-01
Fit On G17



SCRDM-02
Fit On M1911



SCRDM-03
Fit On P226



SCRDM-04
Fit On M92



SCRDM-05
Fit On XD



SCRDM-06
Fit On S&W M&P



SCRDM-07HK
Fit On HK USP



SCRDM-08
For MOJ Footprint



SCRDM-09
For MAG Footprint




SCFRM-16
MOS to MAG Adapter



SCFRM-12
MOS to VOD Adapter



SCFRM-13
MOJ to VOD Adapter

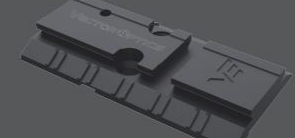

SCFRM-18
CZ Shadow 2 VOD Adapter


OTHERS



SCRA-03
Picatinny Riser Rail



SCRA-31
Dovetail to Picatinny Rail

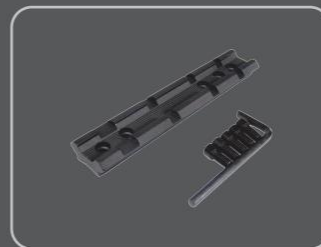

SCRA-06A
Dovetail to Weaver Rail



SCRA-34
45° Offset Picatinny Rail




SCRA-51
45° Offset Dual Picatinny Rails



SCRA-57
Ultra Offset Picatinny Rail Mount



SCRA-58 / SCRA-59 / SCRA-60
0.5" / 0.83" / 1"
Picatinny Riser Mount

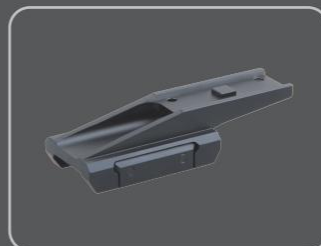

SCPSM-01
Cantilever Picatinny Riser Mount



SCPSM-02
Cantilever Picatinny Riser Mount

RED DOT SIGHT PICATINNY / WEAVER MOUNT



RISER

- SCRA-71 | MOJ Footprint
- SCRA-67 | TEK Footprint
- SCRA-73 | MAG Footprint
- SCFRM-11 | MAG Footprint (Polymer)



OFFSET


- SCFRM-01 | TEK Footprint
- SCFRM-02 | MOJ Footprint
- SCFRM-03 | MAG Footprint
- SCFRM-04 | TEK Footprint



OFFSET

- SCFRM-14 | VOD Footprint
- SCFRM-15 | VOD Footprint
- SCFRM-17 | VOD Footprint

PICATINNY / DOVETAIL MOUNT

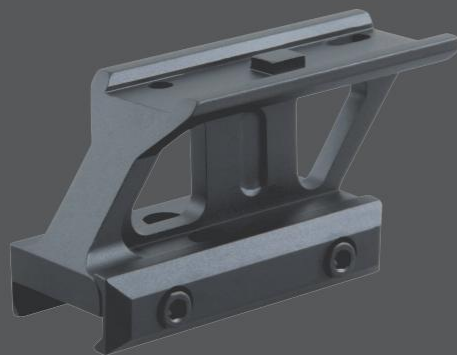

MAV-P10 | 1.0" Profile Cantilever



MAV-P05 | 0.5" Profile Cantilever



MAV-P10 | 1.0" Profile Cantilever



MAV-P08 | 0.83" Profile Cantilever



MAV-P15 | 1.5" Profile Cantilever



MAV-QD10
1" Profile Cantilever QD



MAV-DL
Extreme Low Profile Dovetail






QUALIFIED PRODUCTS, PRACTICAL FUNCTIONS, COMPETITIVE PRICE

S6

1-6x24
Second Focal Plane



FMC



Turret Lock



30mm Tube



Shock Proof




Reset to Zero



Nitrogen



Available In Coyote FDE

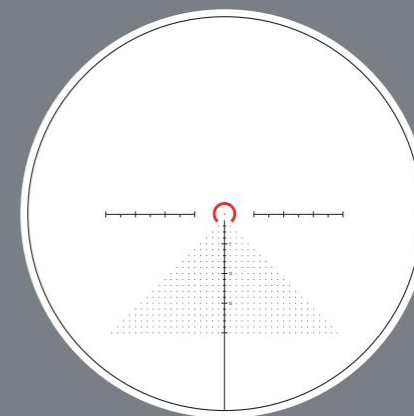

VI-CTSIX (MIL)

FEATURES

- ▶ 30mm Monotube
- ▶ Fully-Multi Coated
- ▶ Edge-To-Edge Image
- ▶ Wide Field Of View
- ▶ Red & Green Illumination
- ▶ Zero Reset & Turret Lock



704 Tactical, USA

The S6 packs a lot into an affordable package. It's incredibly versatile and easy to use both up close and far away. The reticle is great for CQB and distance shooting. The glass is clear and the eye box and eye relief is forgiving.

SPECS

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	F.O.V (@100meters)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL22	1-6x	24mm	16.0-4.0	109.2-18.2 feet	33.3-5.5 meters	101 / 4.0	249 / 9.8	425 / 15.0	30mm	>50MIL	>50MIL	1/5MIL	100yds	VI-CTSIX	5 levels R & G
OPSL23															


S4

1.5-6x28 | 3-12x40 | 4-16x44 | 6-24x50

First Focal Plane | Second Focal Plane



FMC



Turret Lock



30mm Tube



Shock Proof




4x Zoom



Nitrogen

A1

OPSL07 | 4x20




Duplex (MOA)

- ▶ 19mm Tube
- ▶ Multi Coated
- ▶ Weaver & Dovetail Mount

A1

OPSL19 | 4x32




Duplex (MOA)

- ▶ 1in (25.4mm) Tube
- ▶ Multi Coated
- ▶ 1/4MOA Adjustment

A3

OPSL09 | 2-6x32




R14 Ranging

- ▶ 1in (25.4mm) Tube
- ▶ Multi Coated
- ▶ 1/4MOA Adjustment

B1

OPSL25 | 4x32




R14 Ranging

- ▶ 1in (25.4mm) Tube
- ▶ Multi Coated
- ▶ 1/4MOA Adjustment

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL07	4x	20mm	5.0	N/A	75 / 3.0	270 / 10.6	100 / 3.5	19mm	40MOA	40MOA	1/4MOA	100yds	N/A	N/A
OPSL19			7.5	5.8°	80-70 / 3.1-2.8	292 / 11.5	280 / 11.0		90MOA	90MOA			Duplex	
OPSL09	2-6x	32mm	4.6-14.0	42.0-15.7°	75-95 / 3.0-3.7	210 / 8.3	360 / 12.7	1in (25.4mm)	60MOA	60MOA		10yds to ∞	R14 Ranging	5 levels R&G
OPSL25	4x		7.5	33.7 feet	90 / 3.5	191 / 7.5	230 / 8.1		90MOA	90MOA		100yds		N/A

B3

OPSL20 | 3-9x40




VMD-2 (MOA)

- ▶ 1in (25.4mm) Monotube
- ▶ Wide Field of View
- ▶ 1/4MOA Adjustment

C3

OPSL28 | 3-9x32




MIL-DOT (MOA)


- ▶ 1in (25.4mm) Monotube
- ▶ Turret Lock
- ▶ Red & Green Illumination

C4

OPSL29 | 3-12x40
OPSL24 | 10-40x50



VMD-2 (MOA)




R14 Ranging

- ▶ 1in (25.4mm) Monotube
- ▶ Fully-Multi Coated
- ▶ Objective Lens Focus

SKU	Magnification	Objective Lens Dia.	Exit Pupil (mm)	F.O.V (@100yds)	Eye Relief (mm / inch)	Length (mm / inch)	Weight (net) (g / oz)	Tube Dia	Elevation Range	Windage Range	Click Value	Parallax Adjustment	Reticle	Illumination
OPSL20	3-9x	40mm	13.3-4.4	34.6-12.6 feet	78 / 3.1	310 / 12.2	370 / 13.0	1in (25.4mm)	60MOA	60MOA		100yds	VMD-2	N/A
OPSL28		32mm	10.6-3.6	37.0-12.5 feet	102-76 / 4.0-3.0	208 / 8.2	380 / 13.4		120MOA	120MOA	1/4MOA	3yds to ∞	MIL-DOT	Stepless R & G
OPSL29	3-12x	40mm	13.3-3.3	35.0-11.6 feet	100 / 4.0	332 / 13.0	510 / 18.0		60MOA	60MOA		10yds to ∞	VMD-2	N/A
OPSL24	10-40x	50mm	5.0-1.3	9.42-2.62 feet	92 / 3.6	420 / 16.5	610 / 21.5		35MOA	35MOA	1/8MOA	25yds to ∞	R14 Ranging	


OPSL12 | 4x32IR
OPSL14 | 4x32

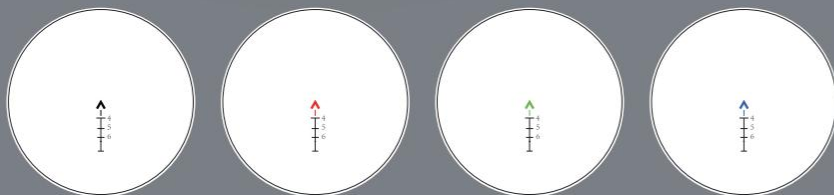

Chevron (MOA)

- ▶ Fully-Multi Coated
- ▶ 1/4MOA Adjustment
- ▶ Etched Glass BDC Reticle

OPSL18 | 1-4x20
OPSL21 | 1-4x20



VMD-2 (MOA)

- ▶ 1in (25.4mm) Monotube
- ▶ Fully-Multi Coated
- ▶ 1/2MOA Adjustment

SRD 1x20

FEATURES

- ▶ 3 MOA Dot Size
- ▶ Available In Picatinny QD Riser Mount & Lower Mount
- ▶ 11 Levels Red Dot Intensity
- ▶ Can be Used on Night Vision



- RDSL27 SRD 1x20
- RDSL28 SRD 1x20 GRA

SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
RDSL27	3MOA	20mm	Free	76 / 3.0	195 / 7.7	>45MOA	>45MOA	1MOA	1x	11 Levels R	CR2032
RDSL28											



T4

RDSL17 | 1x22



FEATURES

- ▶ 3 MOA Dot Size
- ▶ Riser & Low Picatinny Mount
- ▶ 11 Levels Red Dot Intensity

T1

RDSL05 | 1x35



FEATURES

- ▶ 5 MOA Dot Size
- ▶ Available In Weaver and Dovetail Mount
- ▶ 5 Levels Green and Red Dot Intensity

RDSL06 | 1x30



- ▶ 3 MOA Dot Size
- ▶ Available In Weaver Mount
- ▶ 11 Levels Red Dot Intensity

Red Dots

110

VICTOROPTICS®

SKU	Dot Size	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Magnification	Dot Intensity	Battery Type
RDSL17	3MOA	22mm	Free	69 / 2.7	123 / 4.3	100MOA	100MOA	1MOA	1x	11 levels R	CR2032
RDSL05	5MOA	35mm		110 / 4.3	160 / 5.6	80MOA	80MOA			5 levels R & G	
RDSL06	3MOA	30mm		116 / 4.6	137 / 4.8	60MOA	60MOA			11 levels R	

RDSL01 | 1x18



RDSL16 | 1x17x22

RDSL18 | 1x17x22 Dovetail



RDSL25 | 1x17x26



FEATURES


- ▶ 3 MOA Dot Size
- ▶ Available In Weaver Mount
- ▶ 4 Levels Red Dot Intensity
- ▶ Fiber Sight
- ▶ Directly Install on Shotgun Rib
- ▶ Circle Center Point
- ▶ Battery Free

FEATURES

- ▶ 3.5 MOA Dot Size
- ▶ Switch On Side
- ▶ 6 Levels Red Dot Intensity


Z1

1x23x34

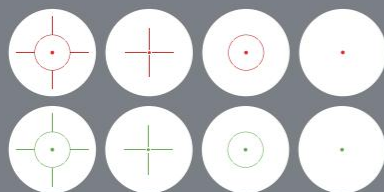

Z3

1x22x33

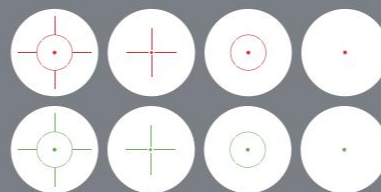

Z4

1x23x34



SKU	Magnification	Lens Dia.	Eye Relief	Length (mm / inch)	Weight (net) (g / oz)	Elevation Range	Windage Range	Click Value	Finish	Dot Intensity	Battery Type
RDSL15	1x	23x34mm	Free	80 / 3.1	115 / 4.0	40MOA	40MOA	1MOA	Black matte	5 levels R & G	CR2032
RDSL20											
RDSL23									Red		
RDSL24		FDE									
RDSL03		Black matte									
RDSL21		22x33mm		82 / 3.2	160 / 5.6	60MOA	60MOA		Red	Stepless R & G	
RDSL22					FDE						
RDSL26				23x34mm		82 / 3.2	140 / 4.9				



BINOCULAR

FEATURES

- Multi Coated Lens
- Roof Prism, Coated Prism
- Center Focus



X1 8x42 | BOSL01



X1 10x42 | BOSL02

SKU	Magnification	Objective Lens Dia.	Optical Structure	Type of Prism	Exit Pupil (mm)	Field of View	Size (mm / inch)	Weight (net) (g / oz)
BOSL01	8x	42mm	4 Groups 6 Lens	BAK7	5.2	6.3°	158x128.6x54 / 6.2x5.1x2.1	660 / 23.3
BOSL02	10x				4.0	5.8°	150x128.6x54 / 5.9x5.1x2.1	636 / 22.4





Established In 2020 Is a Brand Mainly Deals With The Products For
Gun Cleaning, Maintenance, Installation And Supplementary

SNAP CAPS



GUNPANY

117

Snap Caps



.22 LR

.40 S&W

9MM

.45 ACP AUTO

7.62x39MM

.223 REM

300 BLACKOUT

12GA

7.62x51MM

30-06

A snap cap is a device that is shaped like a standard firearms cartridge but contains no primer, propellant, or projectile. It serves the same function as a dummy round but is different in that a dummy is usually made from a real cartridge with its propellant and primer removed (still has the projectile and the casing).

FIBER SIGHT



LA Fiber Sights Combo
SCIS-05



CO Fiber Sights Combo
SCIS-07



SA Fiber Sights Combo
SCIS-06



XS Shotgun Sight
SCIS-08



1.5mm Fiber
GPFR-15



1.0mm Fiber
GPFR-10

BENCH MAT



AR15
SCBM-01



GLOCK
SCBM-02



AK47
SCBM-04



M1911
SCBM-03

CLEANING ROPE KIT

Cleaning Kit 119 GUNFANY



12.7MM



.408



.223 / 5.56



.308



9MM



12GA



.22



.270 / 7MM



.45



.338

CLEANING KIT



27 Pcs Universal Gun Cleaning Kit
SCCK-01



12GA Shotgun
SCCK-08



Airgun .177 & .22
SCCK-10



62 Pcs Universal Gun Cleaning Kit | SCCK-20

- Brass Rod
- Universal Handle
- Utility Cleaning Brush
- 6 Nylon Jags
- 2 Nylon Slotted-tips
- 3 Brass Adaptors
- Plastic Muzzle Guard
- 1 Pack of Cleaning Patches
- Bronze Brush
- Cotton Mop



19 Pcs Cleaning Kit
GPGC-A19B



410 Shotgun
SCCK-09



3 Brushes 2 Picks
GPGC-3B2P



4 Double Side Picks
GPGC-4P



AR15 / M4 Cleaning Kit Pouch
GPGC-A15P

OTHERS



Sling Swivel Loop Weaver Mount Combo
SCOT-36



1.0 Inch Sling Swivels Locking Mount Kit
GUSS-01



1.25 Inch Sling Swivels Locking Mount Kit
GUSS-02



1.0 Inch Push Button QD Sling Swivel
GUSS-03



Double Mag Pouch
GPPD-01



Multi-Fit Holster Right Hand Universal
GPHR-01



Bolt Action Silicon Cover
SCOT-51



1.4 Inch Push Button QD Sling Swivel
GUSS-04

OTHERS



Delta Ring Removal Tool
SCTK-01



AR Assemble Wrench
SCTK-02



AR Stock Castle Nut Wrench
SCTK-03



16 Pcs Boresighter Kit
GPBS-01



Gun Smith Punch Kit
SCOT-46



Compact Gun Trigger Lock
SCOT-35





Rokstad

Mainly Engaged In The Brand Of Monopods, Bipods
Tripods, Gun Stocks And Other Auxiliary Products

SHOOTING SYSTEM

Bipod | Monopod | Binocular Rest | Tripod




● RSGR-07 ● RSGR-08

BBS V Mount Tripod



ELP V Mount Tripod | RSGR-06



MAG V Mount Monopod | RSGR-01



TPM Shooting Rest | RSGR-12



LIT V Mount Bipod | RSGR-05



● RSBR-01 ● RSBR-02

Binocular Tray Rest Mount



Hunting Shooting Stick | SCOT-12

SHOOTING SYSTEM

Bipod Series



● SCBPW-01 | 6.0-7.0"
Center Height 6.0-7.0" (155-180mm)

● SCBPW-02 | 9.0-10.6"
Center Height 9.0-10.6" (230-270mm)

Universal Bipod



6.0-9.0" Sling Stud Bipod
SCBPB-01



9.0-13.5" Sling Stud Bipod
SCBPB-02



6.0-9.0" Swivel Bipod
SCBPS-04



9.0-13.5" Swivel Bipod
SCBPS-05



15.0-26.0" Swivel Bipod
SCBPS-06



Carbon Fiber 6.0-9.0" Spring Bipod
RSCFS-06



Carbon Fiber 6.0-9.0" Spring Bipod
RSCFP-06



Carbon Fiber 9.0-13.5" Swivel Spring Bipod
RSCFS-09



Carbon Fiber 9.0-13.5" Spring Bipod
RSCFP-09

LASER SIGHT

SUBCOMPACT | SMART-SENSOR | IPX4 WATER RESISTANT

Red Laser

Red Laser FDE

Green Laser

Green Laser FDE



VRRL-P01



VRRL-P02



VRGL-P01



VRGL-P02



VRRL-P03



VRRL-P04



VRGL-P03



VRGL-P04

BORE SIGHT



SCBCR-02
12 GA



SCBCR-03
.223 Rem



SCBCR-04
.308 Win



SCBCR-05
7.62x39mm



SCBCR-06
8mm



SCBCR-07
30-06



SCBCR-08
.300 Win



SCBCR-09
7.62x54R



SCBCR-10
20 GA



SCBCR-11
9mm



SCBCR-12
9.3x62mm



SCBCR-13
6.5x55mm



SCBCR-14
.40 S&W



SCRL-05
Red Laser Flashlight Combo



LBC03
Muzzle Drop-in Green Laser Bore Sight

OTHER LASERS



SCGL-01
Green Laser Sight



SCGL-04
Green Laser / IR Laser Combo



SCGL-07
Green Laser Designator



Vaide

SMALL BODY, GREAT POWER IS VAIDE FLASHLIGHT!

SCRAPPER PISTOL FLASHLIGHT

FEATURES

500 Lumens

Strobe Feature

Tactical Low Profile

21mm Weaver Mount

3 Levels Brightness White LED

Smart-Sense Momentary on/off Switch



VAPL-01



VAPL-02



VAPL-03



VAPL-04



Available In Coyote FDE

OTHER HIGH POWER LED SERIES



Grip Flashlight Laser
SCFX-06



Pistol Light
SCFL-06



Grip Flashlight
SCFL-08



Grip Flashlight Red Laser Combo
SCFL-09



Focus On Scope Mounts And Rings And Aims To Provide Higher Quality Products For All Shooting Enthusiasts

MIGHTY

SCOPE RINGS

MIGHTY

30mm



1" Profile Picatinny Rings
XASR-3001 | Center Height 1.0" (25.4mm)

1.25" Profile Picatinny Rings
XASR-3002 | Center Height 1.25" (32mm)

1.4" Profile Picatinny Rings
XASR-3003 | Center Height 1.4" (35mm)

34mm



1.1" Low Profile Picatinny Rings
SCTM-52 | Center Height 1.1" (28mm)

1.4" Medium Profile Picatinny Rings
SCTM-53 | Center Height 1.4" (35mm)


1.6" High Profile Picatinny Rings
SCTM-54 | Center Height 1.6" (40mm)



30mm 1.1" Profile One Piece Dovetail Mount / FDE
XASR-3100 / XASR-F3100 | Center Height 1.1" (28mm)



30mm 1.25" / 1.5" Profile Dovetail Rings
XASR-3005 / XASR-3006 | Center Height 1.25" (32mm) / 1.5" (38mm)

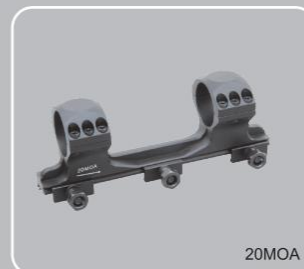

20MOA

30mm One Piece Medium Picatinny Mount
XASR-3010 / XASR-3011 | Center Height 1.25" (32mm)



20MOA

30mm One Piece High Picatinny Mount
XASR-3012 / XASR-3013 | Center Height 1.4" (35mm)



20MOA

34mm One Piece Medium Picatinny Mount
SCTM-60 / SCTM-61 | Center Height 1.4" (35mm)



20MOA

34mm One Piece High Picatinny Mount
SCTM-57 / SCTM-58 | Center Height 1.6" (40mm)

ELITE

SCOPE RINGS

ADJUSTABLE



30mm 1-Piece Extended Picatinny AR Mount
XASR-3031 | Center Height 1.5" (38mm)



30mm 1-Piece Extended Picatinny AR Mount
XASR-3032 | Center Height 1.5" (38mm)



30mm 1-Piece Extended Picatinny AR Mount Coyote
XASR-3035 | Center Height 1.5" (38mm)



30mm 1-Piece Extended Picatinny AR Mount Coyote
XASR-3036 | Center Height 1.5" (38mm)



1" Profile Picatinny Rings XASR-2501
1.25" Profile Picatinny Rings XASR-2502
1.4" Profile Picatinny Rings XASR-2503



30mm Adjustable Picatinny Rings
XASR-3040 | Center Height 1.25-1.5" (32-38mm)



30mm Adjustable Dovetail Rings
XASR-3045 | Center Height 1.4-1.6" (35-41mm)



34mm Adjustable Picatinny Rings
XASR-3050 | Center Height 1.35-1.60" (34.5-40.5mm)



34mm Adjustable Dovetail Rings
XASR-3055 | Center Height 1.5-1.7" (37.5-43mm)



Adjustable Picatinny Rings
XASR-2510



25.4mm Adjustable Dovetail Rings
XASR-2515

SCOPE WEAVER RINGS

30mm




25.4mm / 1in



SKU	Diameter	Width	Center Height	Weight (net)	Material		
SCTM-27	30mm	16mm / 0.6in	21mm / 0.83in	105g / 3.7oz	Alumium Alloy		
SCTM-22			25.4mm / 1in	120g / 4.2oz			
SCTM-08			31mm / 1.2in	130g / 4.6oz			
SCTM-37	25.4mm / 1in		25.4mm / 1in	113g / 4.0oz			
SCTM-56			29mm / 1.14in	125g / 4.4oz			
SCTM-64			31.5mm / 1.25in				

STEEL SCOPE RINGS

25.4mm / 1in

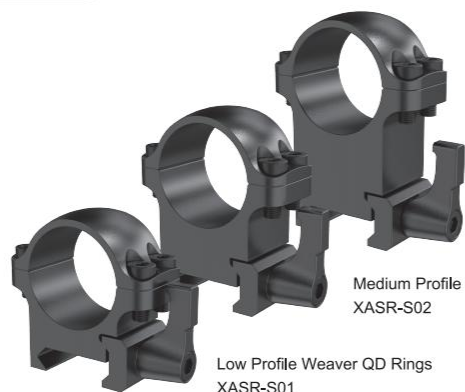


Low Profile Weaver QD Rings
XASR-S01

Medium Profile Weaver QD Rings
XASR-S02

High Profile Weaver QD Rings.
XASR-S03

30mm

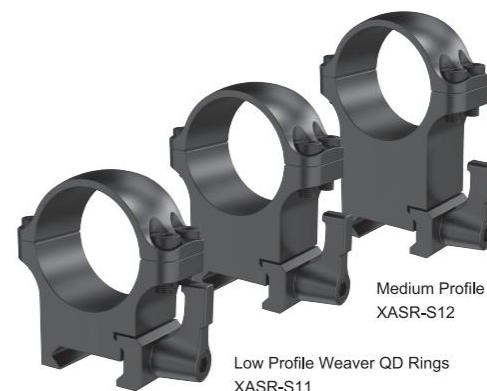

Low Profile Weaver QD Rings
XASR-S11

Medium Profile Weaver QD Rings
XASR-S12

High Profile Weaver QD Rings
XASR-S13

SKU	Diameter	Width	Center Height	Weight (net)	Quick-Detach
XASR-S01	25.4mm	18mm / 0.7in	19mm / 0.75in	135g / 4.8oz	XASR-SQ01
XASR-S02			25.4mm / 1in	160g / 5.6oz	XASR-SQ02
XASR-S03			31.8mm / 1.25in	180g / 6.4oz	XASR-SQ03
XASR-S11	25.4mm / 1in		160g / 5.6oz	XASR-SQ11	
XASR-S12	30mm		31.8mm / 1.25in	175g / 6.2oz	XASR-SQ12
XASR-S13			38.1mm / 1.5in	205g / 7.2oz	XASR-SQ13
SCSR-07	26.5mm	22mm / 0.9in	41mm / 1.6in	320g / 11.3oz	√
SCSR-08	30mm	40mm / 1.6in	38mm / 1.5in	212g / 7.5oz	×




98K Turret Mount Ring
SCSR-07




30mm Flip to Side Picatinny Ring
SCSR-08

SCOPE RINGS

25.4mm / 1in

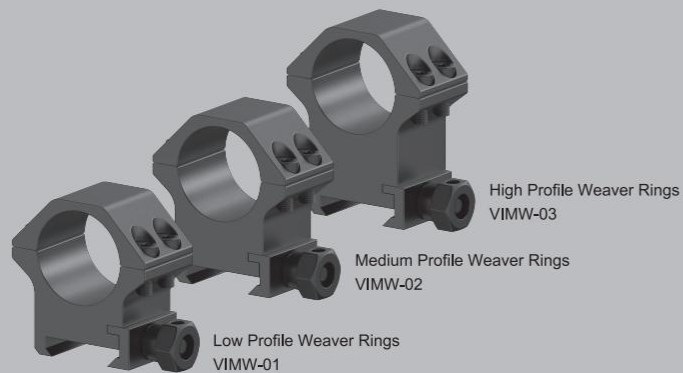


30mm

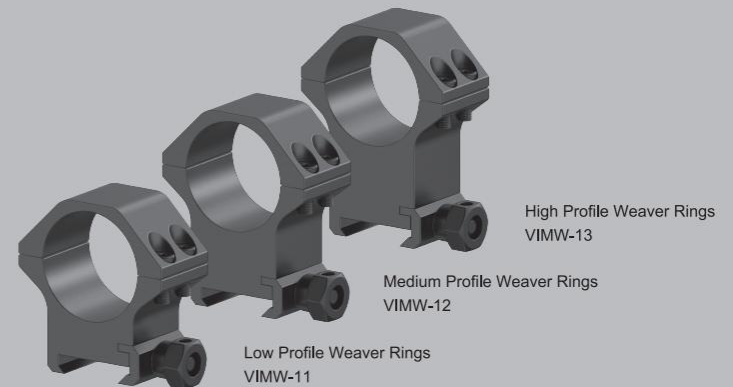

35mm High Profile Picatinny Rings
SCTM-32



35mm / 34mm Medium Profile Picatinny Rings
SCTM-06A / SCTM-06B

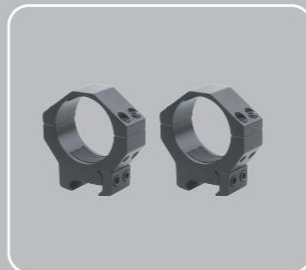

35mm / 34mm Low Profile Picatinny Rings
SCTM-23A / SCTM-23B

SKU	Diameter	Width	Center Height
VIMW-01	25.4mm	21mm / 0.8in	23mm / 0.9in
VIMW-02			26mm / 1.0in
VIMW-03			31mm / 1.2in
VIMW-11	25.4mm / 1.0in		
VIMW-12	30mm		32mm / 1.3in
VIMW-13			36mm / 1.4in
SCTM-32	35mm	22mm / 0.9in	40mm / 1.6in

ANTI CANT DEVICE(ACD)

X-ACCU™

137

Anti Cant Device



30mm Offset Bubble
SCACD-03



25.4mm Offset Bubble
SCACD-04



30mm Offset Bubble w/ Compass
SCACD-05



30mm / 25.4mm Offset Bubble w/ Compass
SCACD-06



40mm Offset Bubble
SCACD-12



34mm Offset Bubble
SCACD-15



Universal Flat
SCACD-19



Offset Bubble Weaver Mount
SCACD-20



Offset Bubble Dovetail Mount
SCACD-21



30 / 25.4mm Offset Bubble w/ Top Rail
SCACD-07



30mm One Piece Weaver Mount
SCACD-23



30mm One Piece Cosine Indicator
SCACD-24



30mm One Piece Dovetail Mount
SCACD-25



30mm Angle Indicator
SCACD-11



Screw-in
SCACD-22

TACTICAL PICATINNY MOUNT



30mm Flip to Side Picatinny Ring
SCTM-17 | Center Height 1.4" (36mm)



30mm One Piece Offset Picatinny Mount
SCTM-24A | Center Height 1.5" (38mm)



30mm Tactical OP Offset Mount Ring XL
SCTM-24B | Center Height 1.5" (38mm)



25.4mm 1" One Piece Offset Picatinny Mount
SCTM-63 | Center Height 1.5" (38mm)

ZERO-RECOIL ONE PIECE MOUNT




30mm One Piece Zero Recoil Dovetail Mount
SCOP-21 | Center Height 1.6" (40mm)



25.4mm 1" One Piece Zero Recoil Dovetail Mount
SCOP-23 | Center Height 1.4" (35mm)



30mm One Piece Zero Recoil Weaver Mount
SCOP-24 | Center Height 1.6" (40mm)

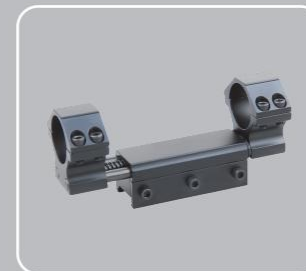

25.4mm 1" One Piece Zero Recoil Weaver Mount
SCOP-25 | Center Height 1.4" (34mm)





Vekt Defense


OTHERS




SCRAAM-52 / 53 / 54
2" / 4" / 5"
M-Model Rail Section




SCRAAM-22 / 23 / 24
2" / 4" / 5"
KeyMod Rail Section

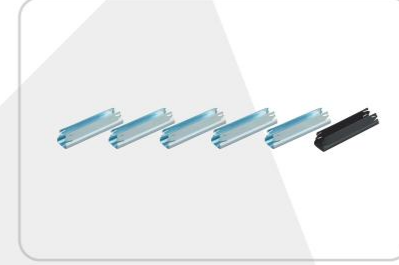

Mosin Nagant Stripper Clip | VDMN-01

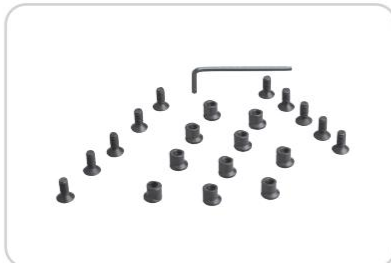

KeyMod Rail Screws Kit | SCKRS

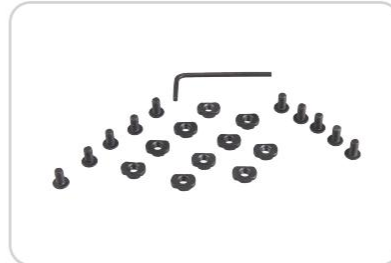

M-Model Rail Screws Kit | SCMLS



AK / SKS Stripper Clips | VDAK-01




R700
Steel Rail Long Bases | SCRA-69



Swiss K31 Dovetail Mount | VDSM-10



Lee Enfield 303 Rail Mount | VDSM-11

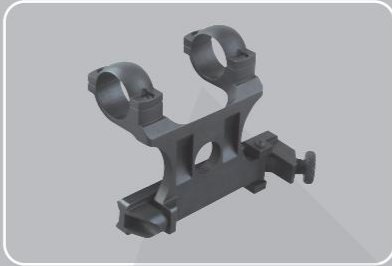

Mosin-Nagant
Steel Side Mount | SCRA-61




Lee Enfield No.4 Steel Mount | SCRA-66




Mosin-Nagant 91/30 PEM | VDSM-12




98K Steel Rail Mount | SCRA-70

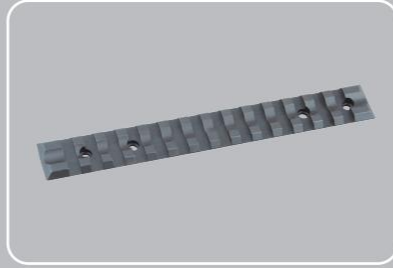


T3 Picatinny Steel Rail | SCTIK-01

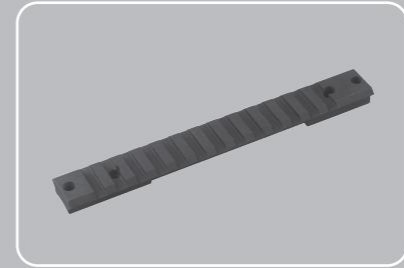


159mm / 6.25"
R700 Steel Rail Long | SCRA-62

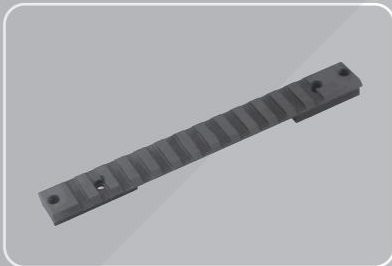

159mm / 6.25"
R700 Steel Rail Long 20MOA | SCRA-63

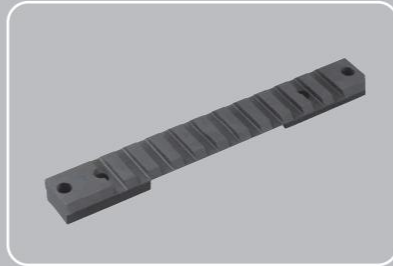

138mm / 5.4"
R700 Steel Rail Short | SCRA-64

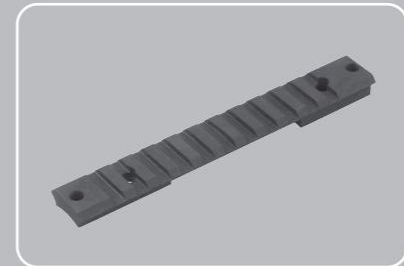

138mm / 5.4"
R700 Steel Rail Short 20MOA | SCRA-65






BRIGHT YOUR NIGHT



NEW

NIGHT VISION

FOCUS ON THERMAL OPTICS & DIGITAL NIGHT VISION DEVICE

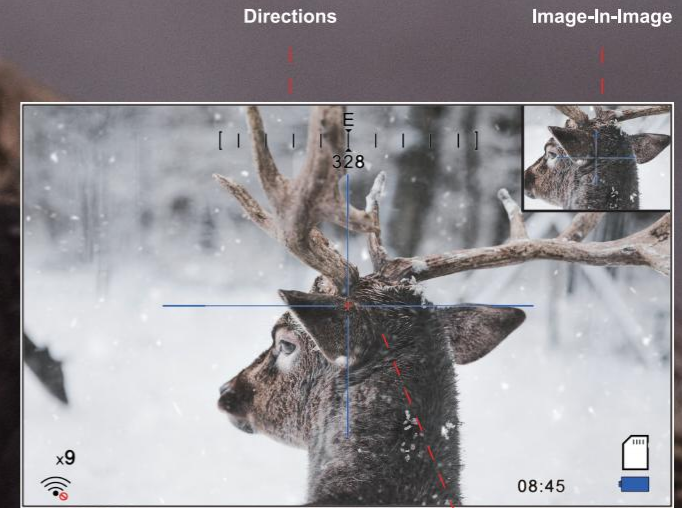

Wifi Image Transmission

Reticle Selections

Digital Night Vision

146

Owlsot



OWNVS-01

3.7-11x50 Digital Night Vision Scope

Up to 600 Meters Observation Range in Dark Environment

With Infrared Reinforcement Light | Multi Reticles Options

Image-In-Image | Video Recording | Wi-Fi | Multi-Language



OWNV-11

4-14x19 Ocular Clip On

HD OLED 0.4"1024x768 Screen | Electronic Compass

400 Meters in Dark Environment | Build-in Reinforcement

3W IR LED | Wifi | Video | IP66 | Image-In-Image



OWNV-10

1x18 Day & Night Helmet Head Mounted

Max 200M in Dark Environment w/ 1w LED IR Light

Focus Adjustment | WIFI | Black & White or Green

1920x1080 | Digital 3x Zoom | Electronic Compass

OWNV-MT10 Flip-up Mount Kit

NIGHT VISION



OWNV-02

5x32 Digital Day & Night Vision Monocular

Max 200 Meters Range in Dark | Digital 3x Zoom

With IR Illuminator | Photo and Video Recording

Compact Portable Palm-in-Hand Size | Ease of Use



OWNVS-02

4-12x50 Digital Day & Night Vision Scope

728x488 | 300 Meters in Dark Environment

Focus Adjust | Color/Black & White/Green Image

Video Recording | IR Reinforce

THERMAL OPTICS

RIFLESCOPE | CLIP-ON | MONOCULARS

VEOT-AD01 | 1x35mm Clip-on

IP67 Water Proof | Max 1800 Meters

384x288 Resolution | 1024x768 OLED

7 Hours Battery Runtime | Recording | w/ Scope Adapter



Thermal Optics

148

Owlsot



VEOT-MC02

MCR35 Monocular

400x300 @ 17μm | Digital 1-4x Zoom | Multi Scene Modes

2.3x Optical Zoom | Detection Range Human 1000M Vehicle 2400M

Full-Color LCOS 0.4" Screen 1280x960 | Color Palettes | IP66



VEOT-MC01

MCC10 Monocular

256x192 @ 12μm | Digital 1x, 2x Zoom | Multi Scene Modes

1.5x Optical Zoom | Detection Range Human 400M Vehicle 1000M

Full-Color LCOS Screen 1280x960 | Color Palettes | IP66



VEOT-RS01

RSM50 Riflescope

400x300 @ 17μm | Digital 1-4x Zoom | Multi Scene Modes

3.2x Optical Zoom | Detection Range Human 1400M Vehicle 3000M

Full-Color HD OLED 1024x768 Screen | Color Palettes Reticles





INTERNATIONAL
ARMOUR CO.
VECTOR OPTICS®.COM