



VECTOR OPTICS

CONTINENTAL 34MM FFP



INFORMATION

f www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope

y www.youtube.com/@VectorOptics

u <https://www.vectoroptics.com/>



CONTINENTAL FFP

FIRST FOCAL PLANE

COUNT REVOLUTION



1ST ROUND
PIN KEEPS STILL



2ND ROUND
PIN(RED) INDICATES



3RD ROUND
PIN(RED&SILVER) INDICATES

TACTILE & REPEATABLE TURRET

Zero Stop & Turret Lock Adjustment System Made of 7075 T6 That Never Snag on Anything and Never Get Turned.

ILLUMINATION

6x with daylight visible 6 level red illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 10 Yards to Infinite

TUBE SIZE & SHOCK PROOF

34mm Monotube Made of 6061 T6, 1000G Shock Proof
Can hold recoil of .338 Ammo.

6X ZOOM

True 6x Zoom Factor, Constant 4" Eye Relief without Inside Dark Ring Around Image.



LIFETIME WARRANTY

Quality Through Precision



NO DISTORTION
CONTINENTAL 34MM

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent For Dawn, Dusk Even at Night Shooting.

All Fields of Application For Hunting, Sporting & Competition.



VEPRO FMC
CONTINENTAL 34MM

FULLY MULTI COATED


99.3% To 99.5% Light Transmission For Each Lens
Max The Optimization Of Color Rendition, Resolution, Contrast Light Transmission

FFP With by Using LaREE Lens & VePRO FMC > 90% Light Transmission.


								
	SCFF-31	SCFF-28	SCFF-29	SCFF-30	SCFF-40	SCFF-41	SCFF-43	SCFF-40
Magnification	1-6x	3-18x	4-24x	5-30x	4-24x	5-30x	3-18x	4-24x
Objective Lens Dia	28mm	50mm	56mm	56mm	56mm	56mm	50mm	56mm
Ocular Lens Dia	42mm	42mm	42mm	42mm	42mm	42mm	42mm	42mm
Tube Dia	34mm	34mm	34mm	34mm	34mm	34mm	34mm	34mm
Exit Pupil (mm)	8.0-4.6	8.0-2.8	8.0-2.3	8.0-1.8	8.0-2.3	8.0-1.8	8.0-2.8	8.0-2.3
F.O.V (@100 yards)	112.5-20.4 feet	40.8-6.8 feet	30.6-5.1 feet	24.5-4.1 feet	30.6-5.1 feet	24.5-4.1 feet	40.8-6.8 feet	30.6-5.1 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Optics Coating	FMC	FMC	FMC	FMC	FMC	FMC	FMC	FMC
Reticle	VCT-BNW	VCT-34FFP	VCT-34FFP	VCT-34FFP	VEC-MBR	VEC-MBR	VEC-MBR	VEC-MBR
Weight (net, g / oz)	550 / 19.4	720 / 25.4	780 / 27.5	810 / 28.6	780 / 27.5	810 / 28.6	720 / 25.4	780 / 27.5
Length (mm / inch)	296 / 11.7	338 / 13.3	362 / 14.3	392 / 15.4	362 / 14.3	392 / 15.4	337 / 13.3	362 / 14.3
Click Value	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL
Elevation Range	52MIL	44MIL	34MIL	26MIL	34MIL	26MIL	44MIL	34MIL
Windage Range	20MIL	16MIL	16MIL	16MIL	16MIL	16MIL	16MIL	16MIL
Parallax Setting	100yds	10yds to ∞	10yds to ∞	10yds to ∞	10yds to ∞	10yds to ∞	10yds to ∞	10yds to ∞
Finish	Black matte	Black matte	Black matte	Black matte	Black matte / FDE	Black matte	Black matte	Black matte / FDE
Illumination	6 Gear Red	6 Gear	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red
Waterproof	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Shock Proof	1000g	1000g	1000g	1000g	1000g	1000g	1000g	1000g
Housing Material	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6
ED Glass	×	×	×	×	×	×	×	×
Light Transmission	> 90%	> 90%	> 90%	> 90%	> 90%	> 90%	> 90%	> 90%
Zero Stop	√	√	√	√	√	√	√	√
Turret Lock Relations	√ 	√ 	√ 	√ 	√ 	√ 	√ 	√ 

FFP


RETICLE PATTERN

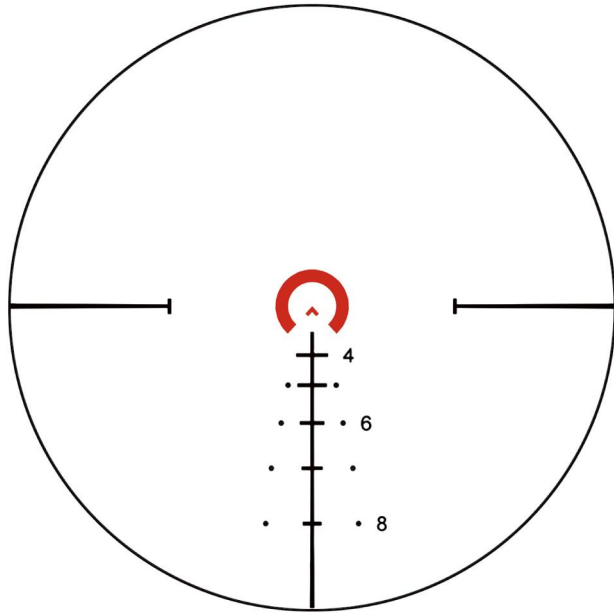

VCT-BNW

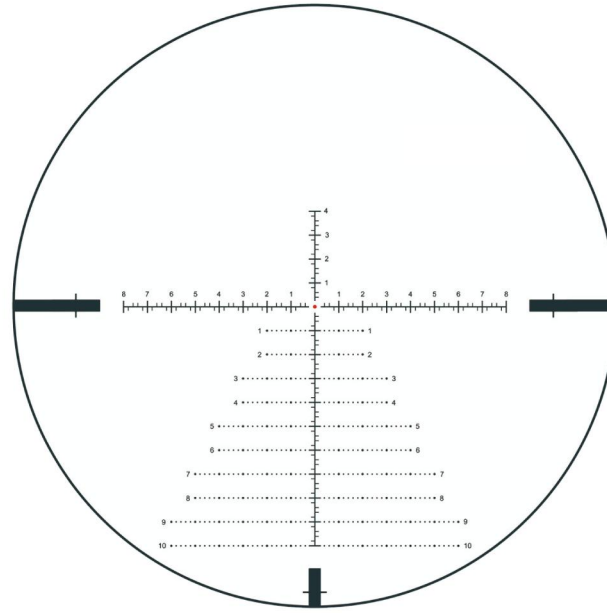

VCT-34FFP

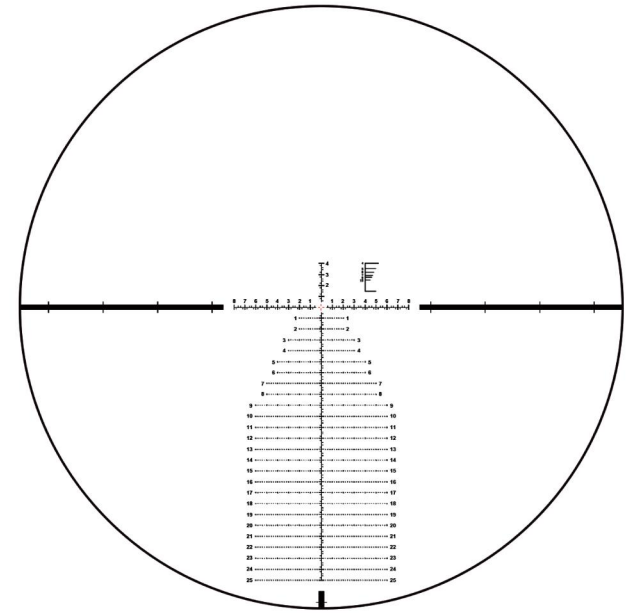

VEC-MBR

EXTRA PURCHASE



Metal Flip-up Cap



Parallax Big
Side Wheel



Power Ring
Throw Lever



VECTOR OPTICS

CONTINENTAL HUNTING



INFORMATION



www.facebook.com/vectoropticsofficial
www.facebook.com/groups/vectoropticscope



www.youtube.com/@VectorOptics



<https://www.vectoroptics.com/>



CONTINENTAL HUNTING

TACTILE REGULATE

Audible Mechanical Clicks, Reset to Zero & Turret Lock
Adjustment System Made of 7075 T6 That Never Snags on Anything and Never Get Turned.

TACTILE & REPEATABLE TURRET



WATER



DUST



FALSE TOUCH

Against Water, Dust, And Unintentional Damage

ILLUMINATION

8x With Daylight Visible 11 Level Red Illumination And a 6-Hour Auto Shut Down.

6x With Daylight Visible 6 Level Red Illumination.

PARALLAX SETTING

Side Focus Parallax Min Starts from 10 Yards to Infinite.

TUBE SIZE & SHOCK PROOF

30mm Monotube Made of 6061 T6, 750G Shock Proof Can Hold Recoil Of .338 Ammo.

8x & 6x ZOOM

True 8x & 6x Zoom Factor, Constant 4" Eye Relief without Inside Dark Ring Around Image



LIFETIME WARRANTY

Quality Through Precision



NO DISTORTION

CONTINENTAL HUNTING 8x & 6x

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

All Fields of Application for Hunting, Sporting & Competition.



VEPRO FMC



ED GLASS
CONTINENTAL 8x

FULLY MULTI COATED

99.3% To 99.5% Light Transmission For Each Lens
Max The Optimization Of Color Rendition, Resolution, Contrast Light Transmission

Hunting With by Using LaREE Lens & VePRO FMC Lens.

90% Light Transmission Of 6x.

93% Light Transmission Of 8x.

ED GLASS(8x)

Extra-Low Dispersion Glass Razor-Sharp Images
Excellent Light Transmission.

HUNTING



	SCOC-23	SCOM-23	SCOM-15	SCOM-38	SCOM-34	SCOL-X21	SCOL-X22	SCOC-37
Magnification	1-6x	1.5-9x	2-12x	2.5-15X	2.5-15x	3-18x	5-30X	1-8x
Objective Lens Dia	24 mm	42mm	50mm	56mm	56mm	50mm	56mm	24 mm
Ocular Lens Dia	42mm	42mm	42mm	42mm	42mm	42mm	42mm	42mm
Tube Dia	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Exit Pupil (mm)	9.5-4.0	9.5-4.9	9.5-4.2	9.5-3.7	9.5-3.7	9.5-2.8	9.5-1.9	6.5-3.0
F.O.V (@100 yards)	124.5-20.7 feet	84-14 feet	63-10.5 feet	49.8-8.3 feet	49.8-8.3 feet	41.5-6.9 feet	24.9-4.2 feet	123-15.4 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Optics Coating	FMC	FMC	FMC	FMC	FMC	FMC	FMC	FMC
Reticle	Garman#4	Garman#4	VET-10BDC	Garman#4	VECON-CDM	VECON-CDM	VECON-CDM	German#4
Weight (net, g / oz)	480 / 16.9	580 / 20.5	605 / 21.4	670 / 23.6	670 / 23.6	654 / 25.7	688 /27.1	493 / 17.4
Length (mm / inch)	283 / 11.1	335 /13.1	335 / 13.2	370 /14.6	370 / 14.6	337 / 13.3	400 /15.7	284 / 11.2
Click Value	1/2 MOA	1/4MOA	1/4 MOA	1/4MOA	1/4MOA	1/4MOA	1/4 MOA	1/2MOA
Elevation Range	140 MOA	140MOA	140 MOA	110MOA	110MOA	75MOA	60MOA	140MOA
Windage Range	140 MOA	140MOA	140MOA	110MOA	110MOA	75MOA	60MOA	140MOA
Parallax Setting	100yds	100yds	100yds	10yds to ∞	10yds to ∞	10yds to ∞	15yds to ∞	100yds
Finish	Black matte	Black matte	Black matte	Black matte	Black matte	Black matte	Black matte	Black matte
Illumination	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red
Waterproof	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Shock Proof	1000g	1000g	1000g	1000g	1000g	1000g	1000g	1000g
Housing Material	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6
ED Glass	×	×	×	×	×	×	×	×
Light Transmission	90%	90%	90%	90%	90%	90%	90%	90%
Zero Stop	√	√	√	√	√	√	√	√
Turret Lock	√	√	√	√	√	√	√	√
Relations								

HUNTING



SCOM-39



SCOL-50



SCOL-51




SCOL-21

Magnification	2-16 x	3-24x	4-32x	3-18x
Objective Lens Dia	44mm	56mm	56mm	50mm
Ocular Lens Dia	41 mm	40mm	40mm	42mm
Tube Dia	30mm	30mm	30mm	30mm
Exit Pupil (mm)	6.5-2.8	8.5-2.3	8.5-1.7	9.5-2.8
F.O.V (@100 yards)	61.5-7.7 feet	41-5.1 feet	30.8-3.8 feet	41.5-6.9 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Optics Coating	FMC	FMC	FMC	FMC
Reticle	VET-10BDC	VECON-CDM	VECON-CDM	VET-10BDC
Weight (net, g / oz)	611 / 21.6	736 / 26	730 / 25.7	630 / 22.2
Length (mm / inch)	345 / 13.6	376 / 14.8	386 / 15.2	383 / 15.1
Click Value	1/4MOA	1/4MOA	1/4MOA	1/4MOA
Elevation Range	110MOA	80MOA	70MOA	75MOA
Windage Range	110MOA	80MOA	70MOA	75MOA
Parallax Setting	20yds to ∞	20yds to ∞	20yds to ∞	10yds to ∞
Finish	Black matte	Black matte	Black matte	Black matte
Illumination	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red
Waterproof	IP67	IP67	IP67	IP67
Shock Proof	1000g	1000g	1000g	1000g
Housing Material	6061 T6	6061 T6	6061 T6	6061 T6
ED Glass	√	√	√	√
Light Transmission	93%	93%	93%	93%
Zero Stop	√	√	√	√
Turret Lock	√	√	√	√
Relations				


New products are coming soon

HUNTING


RETICLE PATTERN

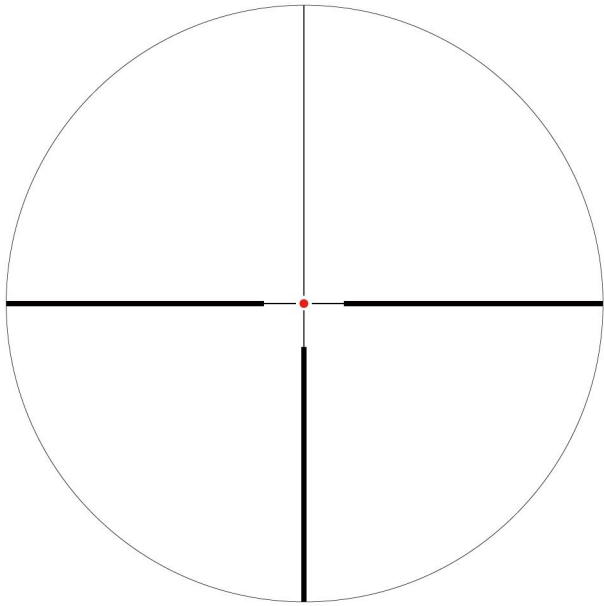

German#4

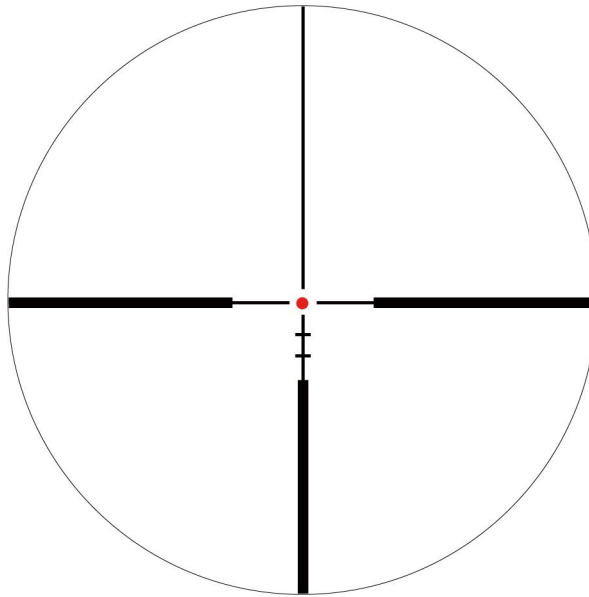

VET-10BDC

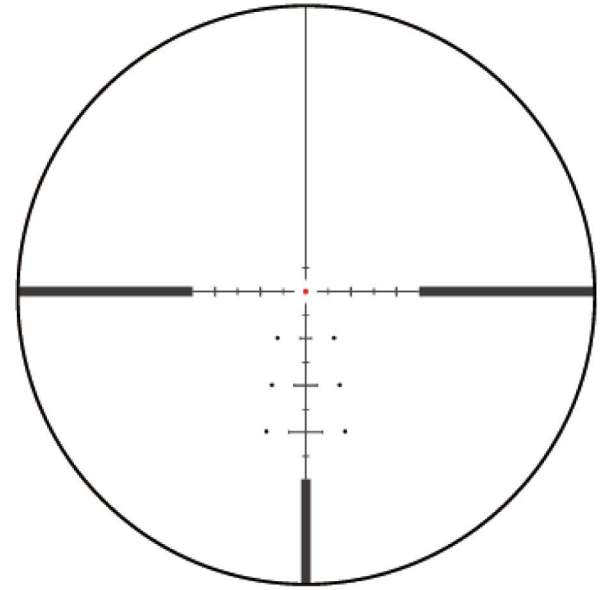

VECON-CDM (MOA)

EXTRA PURCHASE



Metal Flip-up Cap



Parallax Big
Side Wheel



Power Ring
Throw Lever



VECTOR OPTICS

CONTINENTAL TACTICAL



INFORMATION



www.facebook.com/vectoropticsofficial/
www.facebook.com/groups/vectoropticscope/



www.youtube.com/@VectorOptics



<https://www.vectoroptics.com/>



CONTINENTAL TACTICAL

ZERO STOP FUNCTION



8x & 6x ZOOM

True 8x & 6x Zoom Factor, Constant 4" Eye Relief without Inside Dark Ring Around Image



LIFETIME WARRANTY

Quality Through Precision



NO DISTORTION

CONTINENTAL TACTICAL 8x & 6x

IMAGE QUALITY

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting.

All Fields of Application for Hunting, Sporting & Competition.

ILLUMINATION

8x with daylight visible 11 level red illumination and a 6-hour auto shut down

6x with daylight visible 6 level red illumination

SIDE PARALLAX

Side Focus Parallax Min Starts from 10 Yards to Infinite

TACTILE & REPEATABLE TURRET

Zero-Stop Elevation Adjustment System Made of 7075 T6 That Never Snag on Anything and Never Get Turned.

Turret Lock Windage Adjustment System Made of 7075 T6 That Never Snag on Anything and Never Get Turned.



VEPRO FMC
CONTINENTAL 8x



ED GLASS
CONTINENTAL 8x

FULLY MULTI COATED

99.3% To 99.5% Light Transmission For Each Lens
Max The Optimization Of Color Rendition, Resolution, Contrast Light Transmission

Tactical With by Using LaREE Lens & VePRO FMC Lens
6x > 90% Light Transmission.
8x 93% Light Transmission.

ED GLASS(8x)

Extra-Low Dispersion Glass Razor-Sharp Images
Excellent Light Transmission.



SCOC-23T



SCOL-53



SCOC-34



SCOL-54



SCOL-43



SCOL-47



SCOC-T37



SCOM-T39

Magnification	1-6x	3-18x	1-6x	4-24x	4-24x	5-30x	1-8x	2-16x
Objective Lens Dia	24mm	50mm	24mm	50mm	50mm	56 mm	24mm	44mm
Ocular Lens Dia	42mm	42mm	42mm	42mm	42mm	42mm	40mm	42mm
Tube Dia	30mm	30mm	30mm	30mm	30mm	30mm	30mm	30mm
Exit Pupil (mm)	9.0-4.0	9.5-2.8	9.5-4.0	9.5-2.1	9.5-2.1	9.5-1.9	6.5-3.0	6.5-2.8
F.O.V (@100 yards)	124.5-20.7 feet	41.5-6.9 Feet	124.5-20.7 feet	31.1-5.2 feet	31.1-5.2 Feet	24.9-4.2 feet	123-15.4 feet	61.5-7.7 feet
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0
Optics Coating	FMC	FMC	FMC	FMC	FMC	FMC	FMC	FMC
Reticle	VEC-T6M	VCT-10A	VEC-T6M	VCT-20A	VCT-20A	VCT-20A	VEC-T8M	VTC-10A
Weight (net, g / oz)	480 / 16.9	580 / 20.5	480 / 16.9	605 / 21.4	605 / 21.4	630 / 22.2	523 / 18.4	611 / 21.6
Length (mm / inch)	283 / 11.1	337 / 13.3	283 / 11.1	370 / 14.6	370 / 14.6	400 / 15.7	284 / 11.2	345 / 13.6
Click Value	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL
Elevation Range	45MIL	21.5MIL	45MIL	20MIL	20MIL	16.5MIL	40MIL	32MIL
Windage Range	45MIL	21.5MIL	45MIL	20MIL	20MIL	16.5MIL	40MIL	32MIL
Parallax Setting	100yds	100yds to ∞	100yds	15yds to ∞	15yds to ∞	15yds to ∞	100yds	20yds to ∞
Finish	Black matte	Black matte	FDE	Black matte	FDE	Black matte	Black matte	Black matte
Illumination	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	11 Gear Red	11 Gear Red
Waterproof	IP67	IP67	IP67	IP67	IP67	IP67	IP67	IP67
Shock Proof	1000g	1000g	1000g	1000g	1000g	1000g	1000g	1000g
Housing Material	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6
ED Glass	×	×	×	×	×	×	√	√
Light Transmission	90%	90%	90%	90%	90%	90%	93%	93%
Zero Stop	×	√ (Elevation)	×	√ (Elevation)	√ (Elevation)	√ (Elevation)	×	√ (Elevation)
Turret Lock	√	×	√	×	×	×	√	×
Relations								

TACTICAL



SCOL-T50



SCOL-T51



SCOL-21T



SCOL-33T



SCOL-22T



SCOC-44




SCOC-45


Magnification	3-24x	4-32X	3-18x	4-24x	5-30x	1-6x	1-8x	
Objective Lens Dia	56mm	56mm	50mm	50mm	56 mm	24 mm	24 mm	
Ocular Lens Dia	42mm	42mm	42mm	42mm	42mm	42mm	42mm	
Tube Dia	30mm	30mm	30mm	30mm	30mm	30mm	30mm	
Exit Pupil (mm)	8.5-2.3	8.5-1.7	9.5-2.8	9.5-2.1	9.5-1.9	9.4-4.0	8.5-3.0	
F.O.V (@100 yards)	41-5.1 feet	30.8-3.8 feet	41.5-6.9 feet	31.1-5.2 feet	24.9-4.2 feet	124.5-20.7 feet	123-15.38 feet	
Eye Relief (mm / inch)	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	100 / 4.0	97 / 3.8	95 / 3.7	
Optics Coating	FMC	FMC	FMC	FMC	FMC	FMC	FMC	
Reticle	VCT-20A	VCT-20A	VCT-10A	VCT-20A	VCT-20A	IPSC BDC	IPSC BDC	
Weight (net, g / oz)	836/29.5	832 / 29.4	675 / 23.8	670 / 23.6	725 / 25.6	?	530 / 18.7	
Length (mm / inch)	376 / 14.8	386 / 15.2	385 / 15.2	370 / 14.6	400 / 15.7	282 / 11.1	284 / 11.2	
Click Value	1/10MIL	1/10MIL	1/10MIL	1/10MIL	1/10MIL	0.1MRAD	0.1MRAD	
Elevation Range	23MIL	20MIL	21.5MIL	20MIL	16.5MIL	40MRAD	40MRAD	
Windage Range	23MIL	20MIL	21.5MIL	20MIL	16.5MIL	40MRAD	40MRAD	
Parallax Setting	2yds to ∞	20yds to ∞	10yds to ∞	100yds	10yds to ∞	100yds	100yds	
Finish	Black matte	Black matte	Black matte	Black matte	Black matte	Black matte	Black matte	
Illumination	11 Gear Red	11 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	6 Gear Red	11 Gear Red	
Waterproof	IP67	IP67	IP67	IP67	IP67	IP67	IP67	
Shock Proof	1000g	1000g	1000g	1000g	1000g	750g	750g	
Housing Material	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	6061 T6	
ED Glass	√	√	√	√	√	×	×	
Light Transmission	93%	93%	>90%	>90%	>90%	>90%	93%	
Zero Stop	√ (Elevation)	√ (Elevation)	√ (Elevation)	√ (Elevation)	√ (Elevation)	×	×	
Turret Lock	×	×	×	×	×	√	√	
Relations								

TACTICAL


RETICLE PATTERN

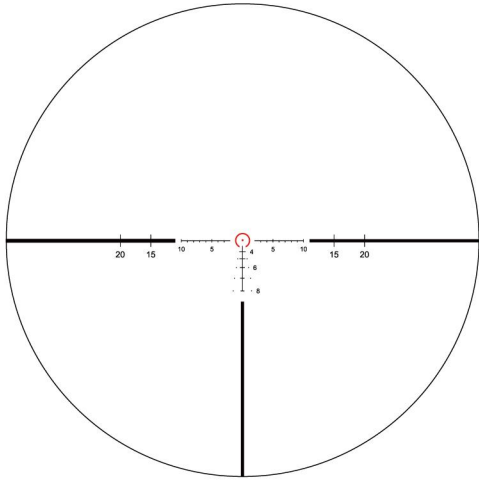


VEC-T6M(MIL)

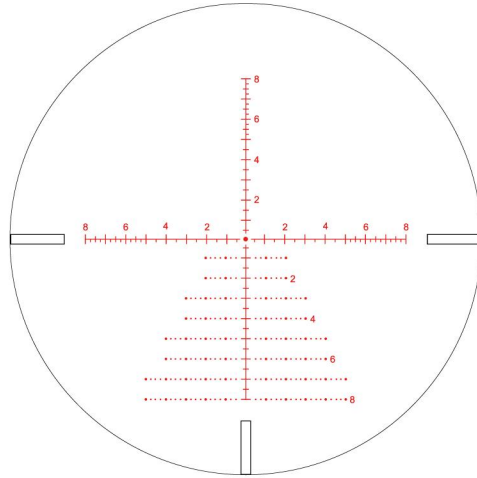

VCT-20A(MIL)

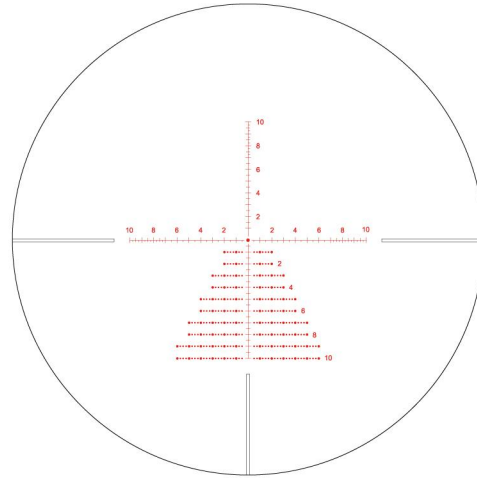

VTC-10A(MIL)

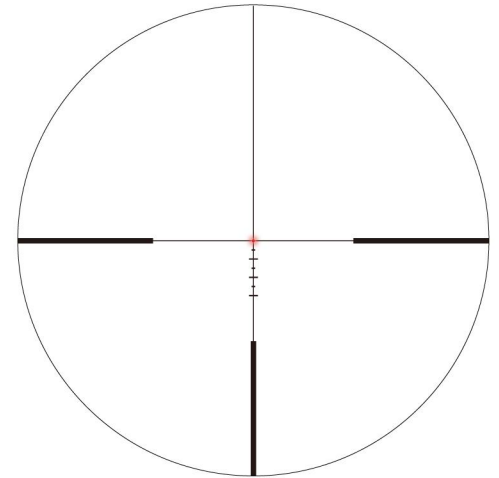

IPSC BDC

EXTRA PURCHASE



Metal Flip-up Cap



Parallax Big Side Wheel



Power Ring Throw Lever