


FAST HELMET

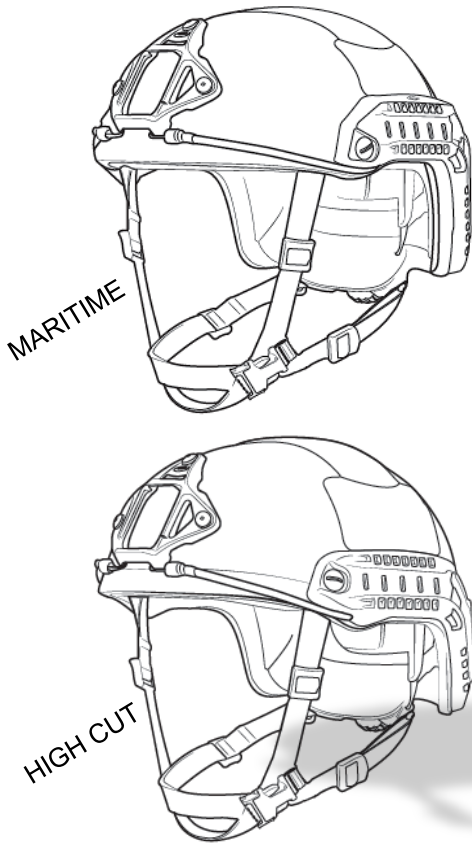

SPECIFICATIONS

NIJ 0101.06 Level IIIA
Aramid against 9mm & .44Mag
Weight 1.45 Kg +/-0.05kgs

Components:

- Durable and water/chemical/UV resistant.
- Four-point adjustable chinstrap retention system
- Pad adjustable suspension system
- Front shroud
- Rail system
- Foam donut in the top / foam pads in the back / suspension net / sweatband / camouflage cover / elastic band / chain strap
- Minimum static load test of 150 lbs.
- Minimum dynamic load test of 25 fps.
- Impact mitigation, less than 150 gs force transmitted to the head at 10 fps.
- Compatible with the use of all major gas masks worn under the helmet.
- Fragmentation Resistance.
- Ballistic performance within the following temperature range:
 - 40 F to +160 F.
- installation of audio communication system inside the ear

